



Video Solutions for Security Professionals

Q1/Q2 2022

Effective February 1, 2022



Table of Contents

Pro-VS Products	4
Pro-VS NVRs	6
Pro-VS IP Cameras	8
Pro-VS IP PTZ Cameras	9
Platinum Products	10
Platinum NVRs	12
Platinum IP Cameras	15
Platinum IP PTZ Cameras	27
Platinum DVRs	28
Platinum HD-TVI Cameras	31
Sapphire Products	36
Sapphire NVRs	38
Sapphire IP Cameras	40
Sapphire DVRs	44
Sapphire HD-CVI Cameras	45
Intercom and Access Control	46
Accessories	52

LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective on February 1, 2022. © 2022 LTS.



About LTS

LTS delivers industry leading security solutions and value-added services in video surveillance with a full line of CCTV, intercom and access control products, cabling and more. Our nationwide locations provide immediate shipping, same-day pickup and timely delivery.

End to End Support

With our achieved, industry-driven sales and technical support team, 10 out of 10 customers have said that LTS helps achieve what most other companies cannot. We are dedicated to provide end-to-end support on any security project needs. Speak with a local branch representative today and experience why LTS has pride in its customer service.

Quality is Key

We focus on quality products, quality customer support, bringing you only what you expect. With our fully committed product management and marketing teams, we ensure that your voice is heard and that your needs are met.

Free IP Consultation

With the complexity of IP networking, we've gone through thousands of R&D tests to make sure we bring the easiest plug-and-play solutions for IP installers. Call to get a free IP consultation today and learn greater skillsets, how to reduce total ownership cost, and how you can bring more value to your customers.





Pro-VS



Color247 Cameras

24/7 Pro-VS Surveillance in Full Color

NEW









VMS Integration Partners




NVR

SKU	VSN7104-P4	VSN7208-P8	VSN7216-P16	VSN7432-P16	VSN8432-R	VSN8864-R
						
Featuring						
Video Input	4CH IP @ 80Mbps	8CH IP @ 160Mbps	16CH IP @ 160Mbps	32CH IP @ 160Mbps	32CH IP @ 384Mbps	64CH IP @ 384Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI1 up to 4K, HDMI2 up to 4K / VGA up to 1080P	HDMI1 up to 4K, HDMI2 up to 4K / VGA up to 1080P
Max. Recording Resolution	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Decoding Format	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264
Decoding Capability	1CH @ 4K / 4CH @ 1080P	2CH @ 4K / 8CH @ 1080P	2CH @ 4K / 8CH @ 1080P	2CH @ 4K / 8CH @ 1080P	2CH @ 12MP / 4CH @ 4K / 16CH @ 1080P	2CH @ 12MP / 4CH @ 4K / 16CH @ 1080P
Max. Playback Resolution	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	4CH/1CH	4CH/1CH	16CH/4CH	16CH/4CH	16CH/4CH
Built-in PoE	4CH	8CH	16CH	16CH	-	-
Network	10/100M, 1 RJ45	10M/100M/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 2 RJ45	10/100/1000M, 2 RJ45
Storage	1 SATA up to 10TB each	2 SATA up to 10TB each	2 SATA up to 10TB each	4 SATA up to 14TB each	4 SATA up to 10TB each; RAID 1, 5	8 SATA up to 10TB each; RAID 0, 1, 5, 6, 10
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0
Dimensions	10.2"(W) x 9.4"(D) x 1.9"(H)	14.9"(W) x 12.4"(D) x 2.1"(H)	14.9"(W) x 12.4"(D) x 2.1"(H)	15.7"(W) x 14.2"(D) x 2.9"(H)	17.4"(W) x 16.8"(D) x 3.5"(H)	17.4"(W) x 16.8"(D) x 3.5"(H)
Recorder Case	Mini 1U	1U	1U	1.5U	2U	2U
Compatible Accessories	-	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately	Rack Mount Included	Rack Mount Included	Rack Mount Included

VMS			
SKU	VSVMS-500	VSVMS-2000	VSVMS-10K
			
	NEW	NEW	NEW
Featuring			
Video Input	250 Devices, 500 CH @ 512Mbps	1000 Devices, 2000 CH @ 512Mbps	2000 Devices, 10,000 CH @ 1024Mbps per server; 30,000 CH with Hierarchical Structure
Video Output	HDMI up to 4K / VGA up to 1080P	2 HDMI up to 4K / VGA up to 1080P	No GUI
Max. Recording Resolution	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Decoding Format	H.265 / H.264	Ultra 265 / H.265 / H.264	H.265 / H.264
User Management	50 Online Users	300 Online Users	1000 Online Users
Power Output	12V DC	12V DC	-
Alarm In/Out	24CH/8CH	24CH/8CH	-
Network	10M/100M/1000M, 4 RJ45	10M/100M/1000M, 4 RJ45; 1000M 2 SFP	10/100/1000M, 3 RJ45
Storage	IP SAN	16 SATA up to 14TB each; RAID 0 / 1 / 5 / 6 / 10 / 50 / 60	IP SAN
Backup	4 USB 3.0	4 USB 3.0	4 USB 3.0
Dimensions	17.3"(W) x 13.6"(D) x 1.9"(H)	18.8"(W) x 19"(D) x 5.1"(H)	19"(W) x 21.7"(D) x 3.4"(H)
Accessory	Rack Mount Included	Rack Mount VS-SL-A Included	-

PRO-VS VMS

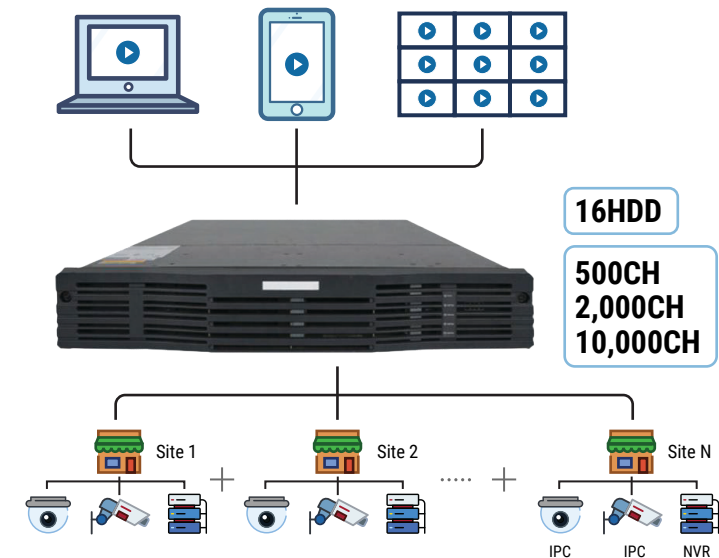







Up to **10,000 channels**
in a single server

Up to **30,000 channels**
in a hierarchical structure









Fixed Lens Camera

SKU	VSIP3C52W-28MA	VSIP3442W-28MA	VSIP3182W-28	VSIP7442W-28S	VSIP7182W-28	VSIP8442W-28MA	VSIP8182W-28					
												
Featuring												
Resolution	5MP, 2880 x 1620 @ 30fps	4MP, 2688 x 1520 @ 30fps	8MP, 3840 x 2160 @ 20fps	4MP, 2592 x 1520 @ 30fps	8MP, 3840 x 2160 @ 20fps	4MP, 2592 x 1520 @ 30fps	8MP, 3840 x 2160 @ 20fps					
Fixed Lens	2.8mm	2.8mm	2.8mm	2.8mm	2.8mm	2.8mm	2.8mm					
Lux	0.001 Lux @ F1.0	0.01 Lux @ F2.0	0.05 Lux @ F2.0	0.01 Lux @ F2.0	0.05 Lux @ F2.0	0.01 Lux @ F2.0	0.05 Lux @ F2.0					
Compression	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264					
IR	Smart LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft					
Feature	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog	True WDR 120dB, 3D DNR, BLC, HLC, Defog					
Audio	Built-in Mic	Built-in Mic	-	Audio In/Out	-	Built-in Mic	-					
Alarm	-	-	-	Alarm In/Out	-	-	-					
Storage	MicroSD up to 256GB, Automatic Network Replenishment	MicroSD up to 256GB, Automatic Network Replenishment	-	MicroSD up to 256GB, Automatic Network Replenishment	-	MicroSD up to 256GB, Automatic Network Replenishment	-					
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis					
Rating	IP67, 2KV Surge Protection	IP67, 2KV Surge Protection	IP67, 2KV Surge Protection	IP67, IK10 Vandal Proof, 2KV Surge Protection	IP67, IK10 Vandal Proof, 2KV Surge Protection	IP67, 2KV Surge Protection	IP67, 2KV Surge Protection					
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE					
Compatible Accessories	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSJB842 Junction Box	 VSJB842 Junction Box

Vari-focal Lens Camera

SKU	VSIP7643W-SZ	VSIP9643W-SZ
	 Junction Box Included	 Junction Box Included
Featuring		
Resolution	4MP, 2592 x 1520 @ 30fps	4MP, 2592 x 1520 @ 30fps
Vari-focal Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens
Lux	0.003 Lux @ F1.6	0.003 Lux @ F1.6
Compression	Ultra 265 / H.265 / H.264	Ultra 265 / H.265 / H.264
IR	Smart IR LED up to 98ft	Smart IR LED up to 164ft
Features	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog
Audio	Audio In/Out	Audio In/Out
Alarm	Alarm In/Out	Alarm In/Out
Storage	MicroSD up to 256GB, Automatic Network Replenishment	MicroSD up to 256GB, Automatic Network Replenishment
Axis	3 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof, 6KV Surge Protection	IP67, 6KV Surge Protection
Power	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	 VSPM763 Wall Mount	 VSPM963 Pole Mount

PTZ Camera

SKU	VSPTZIP424X25WIR	VSPTZIP674X33WIR		
	 NEW	 NEW		
Featuring				
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps		
Lens and Zoom	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.5 - 148.5mm, 33x Optical Zoom, Auto Focus		
Lux	0.003 Lux @ F1.5	0.003 Lux @ F1.5		
Compression	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+		
IR Technology	IR LED up to 330ft	IR LED up to 500ft		
Smart Tracking	Yes	Yes		
Storage	MicroSD up to 256GB, Automatic Network Replenishment	MicroSD up to 256GB, Automatic Network Replenishment		
Movement Range	-15° ~ 90° (Auto Flip)	-15° ~ 90° (Auto Flip)		
Image Enhancement	120dB WDR	120dB WDR		
Audio and Alarm	Audio In/Out, Alarm 2 in 1 out	Audio In/Out, Alarm In/Out		
Outdoor Rating	IP67, IK10	IP66, Metal Housing		
Power	DC 12V 3A, PoE+ (802.3 at), Max 21W	AC 24V±25%, DC 24V±25%, PoE+ (802.3 at), Max 25W		
Dimensions	4" (Φ)	6" (Φ)		
Accessories	Wall Mount Bracket, PoE+ (30W) not included	Wall Mount Bracket, PoE+ (30W) not included		
Compatible Accessories	 VSWM424 Wall Mount, 20cm	 VSWM674 Wall Mount, 31cm	 VSWM424 Wall Mount, 20cm	 VSWM674 Wall Mount, 31cm



Platinum

Best-Selling IP and
HD-TVI CCTV Line

New in Color247 and Low Lux Models

Upgrade 24-Hour Security Solutions with New Platinum Color247 and Low Lux Cameras



NEW IP CAMERAS with Human & Vehicle Detection



Motion Detection 2.0



Human/Vehicle Detection



High Image Resolution




Built-in Mic

Get the Best with Professional and Enterprise Level NVRs and DVRs



Platinum NVR

Up to 4K Video Output for All NVRs, with Built-in PoE and Multi-Camera Configuration



Platinum DVR

5-in-1 Video Format Support

Pro-VS












Platinum

Sapphire











Intercom + Access Control

Accessories

Professional Level Series NVR

SKU	LTN8704Q-P4N	LTN8708Q-P8N	LTN8708K-P8	LTN8608-P8	LTN8716K-P16	LTN8616-P16
						
Featuring						
Video Input	4CH IP @ 40Mbps	8CH IP @ 80Mbps	8CH IP @ 80Mbps	8CH IP @ 80Mbps	16CH IP @ 160Mbps	16CH IP @ 160Mbps
Recording	2MP 4CH @ 30fps/CH	8CH @ 30fps/CH	8CH @ 30fps/CH	8CH @ 30fps/CH	16CH @ 30fps/CH	16CH @ 30fps/CH
	4MP 4CH @ 20fps/CH	8CH @ 20fps/CH	8CH @ 30fps/CH	8CH @ 30fps/CH	16CH @ 30fps/CH	16CH @ 30fps/CH
	8MP 4CH @ 15fps/CH	8CH @ 15fps/CH	8CH @ 20fps/CH	8CH @ 20fps/CH	16CH @ 20fps/CH	16CH @ 20fps/CH
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160), VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P, CVBS
Max. Recording Resolution	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 12MP (4000 x 3072)	Up to 4K, 8MP (3840 x 2160)	Up to 12MP (4000 x 3072)
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Decoding Capability	1CH @ 4K / 4CH @ 1080P	1CH @ 4K / 4CH @ 1080P	2CH @ 4K / 8CH @ 1080P	2CH @ 4K / 8CH @ 1080P	2CH @ 4K / 8CH @ 1080P	4CH @ 4K / 16CH @ 1080P
Max. Playback Resolution	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 12MP (4000 x 3072)	Up to 4K, 8MP (3840 x 2160)	Up to 12MP (4000 x 3072)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	-	4CH/1CH	4CH/1CH	4CH/1CH	4CH/1CH
Built-in PoE	4CH	8CH	8CH	8CH	16CH	16CH
Network	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 6TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN
Support Fisheye #	-	-	-	6	-	6
Support POS #	-	-	-	4 (TCP)	-	8 (TCP)
Backup	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W) x 9.1"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)

Enterprise Level Series NVR

SKU	LTN8916H	LTN8916H-P16	LTN8932H	LTN8932H-P16	LTN8932H-P24
					
Featuring					
Video Input	16CH IP @ 160Mbps	16CH IP @ 160Mbps	32CH IP @ 256Mbps	32CH IP @ 256Mbps	32CH IP @ 256Mbps
Recording	2MP	16CH @ 30fps/CH	16CH @ 30fps/CH	32CH @ 30fps/CH	32CH @ 30fps/CH
	4MP	16CH @ 30fps/CH	16CH @ 30fps/CH	32CH @ 30fps/CH	32CH @ 30fps/CH
	8MP	16CH @ 20fps/CH	16CH @ 20fps/CH	32CH @ 20fps/CH	32CH @ 20fps/CH
Video Output	HDMI1 up to 4K (3840 x 2160), HDMI2 / VGA up to 1920 x 1080P, CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 / VGA up to 1920 x 1080P, CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 / VGA up to 1920 x 1080P, CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 / VGA up to 1920 x 1080P, CVBS up to 704 x 480	HDMI1 up to 4K(3840 x 2160), HDMI2 / VGA up to 1920 x 1080P, CVBS up to 704 x 480
Max. Recording Resolution	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Decoding Capability	4CH @ 4K / 16CH @ 1080P	4CH @ 4K / 16CH @ 1080P	4CH @ 4K / 16CH @ 1080P	4CH @ 4K / 16CH @ 1080P	4CH @ 4K / 16CH @ 1080P
Max. Playback Resolution	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	16CH/4CH	16CH/4CH	16CH/4CH	16CH/4CH	16CH/4CH
Built-in PoE	-	16CH	-	16CH	24CH
Network	10/100/1000M, 2 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 2 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	4 SATA up to 32TB, eSATA, NAS, IP SAN	4 SATA up to 32TB, eSATA, NAS, IP SAN	4 SATA up to 32TB, eSATA, NAS, IP SAN	4 SATA up to 32TB, eSATA, NAS, IP SAN	4 SATA up to 32TB, eSATA, NAS, IP SAN
Support Fisheye #	8	8	8	8	8
Support POS #	8 (TCP or RS232)	8 (TCP or RS232)	16 (TCP or RS232)	16 (TCP or RS232)	16 (TCP or RS232)
Backup	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW
Dimensions	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)

Pro-VS









Platinum

Sapphire





Intercom + Access Control












































Accessories

Enterprise Level Series NVR























SKU	LTN8964-8	LTN8964-R	LTN07128-R16	LTN07256-R16
				
Featuring				
Video Input	64CH IP @ 320Mbps	64CH IP @ 320Mbps	128CH IP @ 768Mbps	256CH IP @ 768Mbps
Recording	2MP	64CH @ 30fps/CH	64CH @ 30fps/CH	128CH @ 30fps/CH
	4MP	64CH @ 20fps/CH	64CH @ 20fps/CH	128CH @ 20fps/CH
	8MP	64CH @ 15fps/CH	64CH @ 15fps/CH	128CH @ 12fps/CH
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA1 up to 2K (2560 x 1440), HDMI2 / VGA2 up to 1080P	HDMI1 up to 4K (3840 x 2160) / VGA1 up to 2K (2560 x 1440), HDMI2 / VGA2 up to 1080P	HDMI1 up to 4K / VGA up to 1080P, HDMI2 up to 4K (4096 x 2160)	HDMI1 up to 4K / VGA up to 1080P, HDMI2 up to 4K, 6 HDMI TV Wall Built-in 7" Touch Screen
Max. Recording Resolution	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Decoding Capability	4CH @ 4K / 16CH @ 1080P	4CH @ 4K / 16CH @ 1080P	5CH @ 4K / 20CH @ 1080P	5CH @ 4K / 20CH @ 1080P
Max. Playback Resolution	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)	Up to 12MP (4000 x 3072)
Audio In/Out	1CH/2CH, RCA	1CH/2CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	16CH/4CH	16CH/4CH	48CH/24CH	48CH/24CH
Network	10/100/1000M, 2 RJ45	10/100/1000M, 2 RJ45	1000M, 4 RJ45, 4 Fiber Optic	1000M, 4 RJ45, 4 Fiber Optic
Storage	8 SATA up to 80TB, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	8 SATA up to 80TB, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 SATA up to 160TB, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 SATA up to 160TB, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10
Support Fisheye #	8	8	16	16
Support POS #	16 (TCP or RS232)	16 (TCP or RS232)	16 (TCP)	16 (TCP)
Hot Swap HDD	-	Yes	Yes	Yes
Backup	3 USB 2.0, 1 USB 3.0, eSATA	3 USB 2.0, 1 USB 3.0, eSATA	2 USB 2.0, 2 USB 3.0	2 USB 2.0, 2 USB 3.0
Dimensions	17.5"(W) x 18.5"(D) x 3.5"(H)	17.5"(W) x 18.5"(D) x 3.5"(H)	17.5" (W) x 19.4"(D) x 5.7"(H)	17.5" (W) x 19.4"(D) x 5.7"(H)

Hybrid Series NVR





































SKU	LTN8708K-HT	LTN8716K-HT
		
Featuring		
Analog Video Input	8CH up to 4K/8MP HD-TVI 4.0 / AHD / CVI / 960H	16CH up to 4K/8MP HD-TVI 4.0 / AHD / CVI / 960H
IPC Input	8CH up to 8MP (3072 x 2048)	16CH up to 8MP (3072 x 2048)
Bandwidth	128Mbps	128Mbps
Video Output	HDMI up to 4K (3820 x 2160) / VGA up to 1080P, CVBS	HDMI up to 4K (3820 x 2160) / VGA up to 1080P, CVBS
Max. Recording Resolution	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Max. Playback Resolution	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)
Audio In/Out	4CH/1CH, RCA	4CH/1CH, RCA
Alarm In/Out	8CH/4CH	16CH/4CH
Network	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	2 SATA up to 16TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN
Support POS #	-	4 (TCP)
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)

Color247 IP Camera						
SKU	CMIP3C42W-28M CMIP3C42W-M CMIP3C42WB-28M	CMIP3C42NW-28MDA CMIP3C42NWB-28MDA CMIP3C42W-MDA CMIP3C42WB-28MDA	CMIP3C82W-28MDA	CMIP8C42W-28MDA	CMIP9C42W-28MD	
		 	 	 	 Junction Box Included 	
Featuring	   	     	      	     	    	
Resolution	4MP, Color247 IP Camera 2560 x 1440 @ 24fps	4MP, Color247 IP Camera 2688 x 1520 @ 30fps	8MP, Color247 IP Camera 3840 x 2160 @ 30fps	4MP, Color247 IP Camera 2688 x 1520 @ 30fps	4MP, Color247 IP Camera 2688 x 1520 @ 30fps	
Fixed Lens	2.8mm / 4mm	2.8mm / 4mm	2.8mm	2.8mm	2.8mm	
Lux	0.0014 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux	
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS 1/3" Progressive Scan CMOS for NW version	1/1.2" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	
Features	True WDR 120dB	True WDR 130dB	True WDR 130dB	True WDR 130dB	True WDR 130dB	
Audio In/Out	-	Built-in Mic	Built-in Mic	Built-in Mic	-	
Storage	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	
Rating	IP67	IP67	IP67	IP67	IP67	
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	
Compatible Accessories	Compatible with CMIP3CXX				Compatible with CMIP8CXX	
	 LTB701 LTB701B Junction Box (White / Black) for CMIP3CXX	 LTB701-A LTB701B-A Junction Box (White / Black) for CMIP3CXX	 LTB342-140 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB331 Pendant Mount for CMIP3CXX	 LTB801 Junction Box for CMIP8C42W-28MDA









Turret Fixed Lens IP Camera

SKU	CMIP1042W-28MA	CMIP3322W-M	CMIP3322W-28MDA	CMIP3342W-28M CMIP3342W-M CMIP3342WB-28M	CMIP3342W-28MA	CMIP3342W-MDA CMIP3342WB-28MDA CMIP3342W-28MDA				
										
Featuring										
Resolution	4MP, 2560 x 1440 @ 20fps	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 20fps	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps				
Fixed Lens	2.8mm	4mm	2.8mm	2.8mm / 4mm	2.8mm	2.8mm / 4mm				
Lux	0.01 Lux @ F2.0	0.028 Lux @ F2.0	0.005 Lux @ F1.6	0.028 Lux @ F2.0	0.018 Lux @ F1.6	0.005 Lux @ F1.6				
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+				
IR	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft				
Audio In/Out	Built-in Mic	-	Built-in Mic	-	Built-in Mic	Built-in Mic				
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 256GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 256GB, Automatic Network Replenishment				
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC				
Rating	IP67	IP67	IP67	IP67	IP66	IP67				
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE				
	Compatible with CMIP10XX, CMIP33XX and CMIP33XXMDA									
Compatible Accessories	 LTB03-W Junction Box (White)	 LTB03-B Junction Box (Black)	 LTB307 Junction Box (White)	 LTB307B Junction Box (Black)	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB331 Pendant Mount for CMIP33XXMDA	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount



Turret Fixed Lens IP Camera

SKU	CMIP3362W-28M CMIP3362WB-28M CMIP3362W-M	CMIP3362W-28MDA CMIP3362WB-28MDA	CMIP1382NW-28MA	CMIP3382NW-28M CMIP3382NW-M	CMIP3382NW-28MA	CMIP3382W-28MDA CMIP3382W-MDA
		 NEW 				 NEW 
Featuring	  	    	    	   	    	     
Resolution	6MP, 3072 x 2048 @ 20fps	6MP, 3200 x 1800 @ 20fps	8MP, 3840 x 2160 @ 15fps	8MP, 3840 x 2160 @ 15fps	8MP, 3840 x 2160 @ 15fps	8MP, 3840 x 2160 @ 30fps
Fixed Lens	2.8mm / 4mm	2.8mm	2.8mm	2.8mm / 4mm	2.8mm	2.8mm / 4mm
Lux	0.028 Lux @ F2.0	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.005 Lux @ F1.6
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft
Audio In/Out	-	Built-in Mic	Built-in Mic	-	Built-in Mic	Built-in Mic
Storage	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 256GB, Automatic Network Replenishment	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 256GB, Automatic Network Replenishment
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67	IP67	IP66	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE


































Compatible with CMIP33XX and CMIP1382NW-18MA

Compatible Accessories										
	LTB03-W Junction Box (White)	LTB03-B Junction Box (Black)	LTB307 Junction Box (White)	LTB307B Junction Box (Black)	LTB301 Wall Mount	LTB342-JBOX Junction Box for Wall Mount	LTB331 Pendant Mount for CMIP33XXMDA and CMIP1382XX	LTB371 Pendant Mount 21.5" (55cm)	LTB378 Pole Mount	LTB379 Corner Mount

Turret Vari-focal Lens IP Camera

SKU	CMIP1043W-MZ	CMIP1043NW-MZ	CMIP3263NW-SZ	CMIP3283NW-SZ				
			 Junction Box Included	 Junction Box Included				
Featuring								
Resolution	4MP, 2560 x 1440 @ 20fps	4MP, 2560 x 1440 @ 20fps	6MP, 3072 x 2048 @ 20fps	8MP, 3820 x 2160 @ 15fps				
Vari-focal Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens				
Lux	0.02 Lux @ F1.6	0.005 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6				
Smart Focus	Yes	Yes	Yes	Yes				
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+				
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft				
Storage	MicroSD Card Slot up to 128GB (Snapshot only)	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment				
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC				
Audio In/Out	-	-	Yes	Yes				
Alarm In/Out	-	-	Yes	Yes				
Rating	IP67	IP67	IP67, IK10	IP67, IK10				
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE				
	Compatible with CMIP10XX, CMIP32XX							
Compatible Accessories	 LTB307 Junction Box (White) for CMIP10XX	 LTB301 Wall Mount for CMIP10XX	 LTB342-140 Wall Mount for CMIP32XX	 LTB342-JBOX Junction Box for Wall Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB331 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

Dome Fixed Lens IP Camera

SKU	CMIP7042W-28MA	CMIP7342W-28M CMIP7342WB-28M CMIP7342W-M CMIP7342W-6M	CMIP7342W-28MDA CMIP7342WB-28MDA CMIP7342W-MDA	CMIP7362W-28M	CMIP7362W-28MDA	CMIP7382NW-28M CMIP7382NW-M	CMIP7382W-28MDA	CMIP7382W-28SH				
												
			 									
Featuring												
Resolution	4MP, 2560 x 1440 @ 20fps	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20fps	6MP, 3200 x 1800 @ 30fps	8MP, 3840 x 2160 @ 15fps	8MP, 3840 x 2160 @ 30fps	8MP, 3840 x 2160 @ 20fps				
Fixed Lens	2.8mm	2.8mm / 4mm / 6mm	2.8mm / 4mm	2.8mm	2.8mm	2.8mm / 4mm	2.8mm	2.8mm				
Lux	0.01 Lux @ F2.0	0.018 Lux @ F1.6	0.005 Lux @ F1.6	0.028 Lux @ F2.0	0.005 Lux @ F1.6	0.028 Lux @ F2.0	0.005 Lux @ F1.6	0.028 Lux @ F2.0				
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+				
IR	IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft				
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC, 1080P HDMI Video Output				
Audio In/Out	Built-in Mic	-	Built-in Mic	-	Built-in Mic	-	Built-in Mic	-				
Storage	MicroSD Slot up to 256GB	MicroSD / SDHC / SDXC Slot up to 128GB	MicroSD / SDHC / SDXC Slot up to 256GB, Auto Network Replenishment	MicroSD up to 128GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 128GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 128GB, Auto Network Replenishment				
Axis	2 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis				
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IK10 Vandal Proof				
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE				
Compatible Accessories	Compatible with CMIP73XX							Compatible with CMIP70XX, CMIP72XXMDA, CMIP73XXSH			For All Cameras	
	 LTB347 Junction Box (White)	 LTB347B Junction Box (Black)	 LTB349 Angled Ceiling Mount (15°)	 LTB348 Wall Mount (White)	 LTB348B Wall Mount (Black)	 LTB342-110 Wall Mount	 LTB342-110B Wall Mount with Junction Box	 LTB376 Pendant Mount 22" (56cm)	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB731 Pendant Mount	 LTB378 Pole Mount

Pro-VS






















Platinum










Sapphire

Intercom + Access Control













Accessories





Dome Vari-Focal Lens IP Camera

SKU	CMIP7043W-MZ	CMIP7043NW-MZ	CMIP7243NW-SZ	CMIP7263NW-SZ	CMIP7283NW-SZ						
			 Junction Box Included	 Junction Box Included	 Junction Box Included						
Featuring											
Resolution	4MP, 2560 x 1440 @ 20fps	4MP, 2560 x 1440 @ 20fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20fps	8MP, 3840 x 2160 @ 15 fps						
Vari-focal Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens						
Lux	0.018 Lux @ F1.6	0.005 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6						
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+						
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft						
Smart Focus	Yes	Yes	Yes	Yes	Yes						
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC						
Storage	MicroSD / SDHC / SDXC Card Slot up to 128GB (Snapshot only)	MicroSD / SDHC / SDXC Card Slot up to 256GB	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment						
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis						
Audio	-	-	Audio In/Out	Audio In/Out	Audio In/Out						
Alarm	-	-	Alarm In/Out	Alarm In/Out	Alarm In/Out						
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof						
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE						
Compatible Accessories	Compatible with CMIP70XX						Compatible with CMIP72XX				
	 LTB701 Junction Box (White)	 LTB342-135 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB342-135B Wall Mount with Junction Box	 LTB381 Pendant Mount 22\" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB388 Pole Mount	 LTB389 Corner Mount



































Mini Dome Fixed Lens IP Camera			
SKU	CMIP3142NW-28S	CMIP3142NW-28SWIFI	CMIP3162NW-28S
			
Featuring			
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20fps
Fixed Lens	2.8mm	2.8mm	2.8mm
Lux	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.028 Lux @ F2.0
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+
IR	Matrix IR LED up to 33ft	Matrix IR LED up to 33ft	Matrix IR LED up to 33ft
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Audio In/Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out
Alarm In/Out	Yes	Yes	Yes
Built-in Wi-Fi	-	Yes	-
Storage	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment
Axis	3 Axis	3 Axis	3 Axis
Rating	IP66, IK8 Vandal Proof	IP66, IK8 Vandal Proof	IP66, IK8 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	Compatible with CMIP31XX		
	 LTB742-120 Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

MicroSD	
MSDX64GUII3CL10-CA1	MSDX128GUII3CL10-CA1
	
<ul style="list-style-type: none"> • ADATA Premier ONE 64GB / 128GB MicroSD • 3D NAND Inside, Ultra HD 8K, 4K, and 3D / VR Recording • R/W: Up to 275MB/155MB per second • UHS-II U3 Class 10 V90 • -25°C to 85°C • Adapter Included • Lifetime Warranty 	
MSDX64GUI3V30G-RA1	
	
<ul style="list-style-type: none"> • ADATA Premier PRO 64GB MicroSD • MLC Inside, Ultra HD 4K Recording • R/W: Up to 95MB/90MB per second • UHS-I U3 Class 10 V30 • -25°C to 85°C • Adapter Included • Lifetime Warranty 	
LTSTZZ758	LTSTZZ759
	
<ul style="list-style-type: none"> • Rescue-Data Recovery Services • 2 / 3 Year Data Recovery Plan • Can be used on any brands of Removeable Flash Memory, Internal and External SSDS and HDDS 	
























Mini-Bullet Fixed Lens IP Camera				
SKU	CMIP8042W-28MA	CMIP8342W-28M CMIP8342W-M CMIP8342WB-28M	CMIP8342W-28MDA	CMIP8362W-28M
				
Featuring				
Resolution	4MP, 2560 x 1440 @ 20fps	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20fps
Fixed Lens	2.8mm	2.8mm / 4mm	2.8mm	2.8mm
Lux	0.01 Lux @ F2.0	0.018 Lux @ F1.6	0.005 Lux @ F1.6	0.028 Lux @ F2.0
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+
IR	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 131ft	Matrix IR LED up to 100ft
Audio In/Out	Built-in Mic	-	Built-in Mic	-
Storage	MicroSD Card Slot up to 256GB	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 256GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	 LTB345 Junction Box (White)	 LTB345 Junction Box (White)	 LTB345 Junction Box (White)	 LTB345 Junction Box (White)

Wi-Fi and Video Doorbell IPC		
SKU	CMIP8942NW-28SWIFI	LTH-7132-WIFI
		
Featuring		
Resolution	4MP, 2688 x 1520 @ 30fps	3MP, 2048 x 1536 @ 30fps
Fixed Lens	2.8mm	2.2mm
Lux	0.018 Lux @ F1.6	-
View	-	180° Panoramic View
Compression	H.265 / H.265+	Smart H.264 Compression
IR	Matrix IR LED up to 33ft	IR up to 16ft
Features	True WDR 120dB, 3D DNR, BLC	DWDR, 3D DNR
Audio In/Out	Built-in Mic and Speaker	Built-in Mic and Speaker
Alarm In/Out	Yes	-
Built-in Wi-Fi	Yes	Yes
Storage	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB
Axis	3 Axis	-
Rating	-	IP65
Power	DC 12V, PoE	AC 8V~AC 24V
Accessories	-	3 Interchangeable Color Faceplates (White / Black / Coral)


Bullet Fixed Lens IP Camera

SKU	CMIP9342W-28M CMIP9342W-M	CMIP9342W-28MD CMIP9342W-MD	CMIP9362W-28M CMIP9362W-6M	CMIP9382NW-28M CMIP9382NW-M	CMIP9382W-MD CMIP9382NW-28MD					
	 Junction Box Included	 Junction Box Included NEW	 Junction Box Included	 Junction Box Included	 Junction Box Included NEW					
Featuring	  	   	  	   	    					
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20 fps	8MP, 3820 x 2160 @ 15fps	8MP, 3840 x 2160 @ 30fps					
Fixed Lens	2.8mm / 4mm	2.8mm / 4mm	2.8mm / 6mm	2.8mm / 4mm	2.8mm / 4mm					
Lux	0.018 Lux @ F1.6	0.005 Lux @ F1.6	0.028 Lux @ F2.0	0.028 Lux @ F1.6	0.005 Lux @ F1.6					
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+					
IR	Matrix IR LED up to 165ft	Matrix IR LED up to 197ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	Matrix IR LED up to 197ft					
Storage	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 256GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 128GB, Automatic Network Replenishment	MicroSD / SDHC / SDXC Card Slot up to 256GB, Automatic Network Replenishment					
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC					
Rating	IP67	IP67	IP67	IP67	IP67					
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE					
Compatible Accessories	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

Bullet Vari-focal Lens IP Camera













SKU	CMIP8043W-MZ	CMIP8043NW-MZ	CMIP9743NW-SZ	CMIP9763NW-SZ	CMIP9783NW-SZ	CMIP9243W-SZ			
			 Junction Box Included	 Junction Box Included	 Junction Box Included	 Junction Box Included			
Featuring									
Resolution	4MP, 2560 x 1440 @ 20fps	4MP, 2560 x 1440 @ 20fps	4MP, 2688 x 1520 @ 30fps	6MP, 3072 x 2048 @ 20fps	8MP, 3820 x 2160 @ 15fps	4MP, 2560 x 1440 @ 30fps			
Vari-focal Lens	2.8 - 12mm Vari-focal Motorized Lens	2.8 - 12mm Vari-focal Motorized Lens	2.8 - 12mm Vari-focal Motorized Lens	2.8 - 12mm Vari-focal Motorized Lens	2.8 - 12mm Vari-focal Motorized Lens	4.7 - 94mm Auto Focus Vari-focal Lens			
Lux	0.018 Lux @ F1.6	0.005 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.007 Lux @ F1.2			
Smart Focus	Yes	Yes	Yes	Yes	Yes	Yes			
Compression	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+	H.265 / H.265+			
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	IR up to 492ft			
Storage	MicroSD Card Slot up to 128GB (Snapshot only)	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment	MicroSD Card Slot up to 128GB, Automatic Network Replenishment			
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	105dB WDR, 3D DNR, BLC			
Audio, Alarm	-	-	3.5mm Audio Jack In/Out, Alarm In/Out	3.5mm Audio Jack In/Out, Alarm In/Out	3.5mm Audio Jack In/Out, Alarm In/Out	Audio In/Out, Alarm In/Out			
Rating	IP67	IP67	IP67	IP67	IP67	IP67			
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE			
Compatible Accessories	 LTB801 Junction Box		 LTB801 Junction Box						
	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount

Thermal IP Camera

SKU	CMIP3T22W1-2M	CMIP9T221-3M
		
Featuring	 	 
Image Sensor	160 x 120 @ 25fps Thermal Image Sensor	160 x 120 @ 25fps Thermal Image Sensor
Thermal Lens	1.8mm Fixed Lens	3.1mm Fixed Lens
Optical Resolution	1920 x 1080 @ 30fps	1920 x 1080 @ 30fps
Optical Lens	2.1mm Fixed Lens	4mm Fixed Lens
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB
WDR	True WDR 120dB	True WDR 120dB
Rating	IP67	IP67




Compatible Accessories	Compatible with CMIP3T22W1-2M and CMIP9T221-3M				
	 LTB701 Junction Box for CMIP3TXX	 LTB801 Junction Box for CMIP9TXX	 LTB342-140 Wall Mount for CMIP3TXX		
	 LTB342-JBOX Junction Box for Wall Mount	 LTB341 Pendant Mount 22" (56cm) for CMIP3TXX	 LTB378 Vertical Pole Mount	 LTB379 Corner Mount	

Fisheye IP Camera

SKU	CMIP7562NF-SE	CMIP75122NF-SE
		
Featuring	    	    
Resolution	6MP, 3072 x 2048 @ 30fps	12MP, 4000 x 3000 @ 20fps
Fixed Lens	1.27mm	2mm
View	360° Fisheye and 180° Panoramic View	360° Fisheye and 180° Panoramic View
Mode	Multiple Viewing Modes and Virtual PTZ	Multiple Viewing Modes and Virtual PTZ
Compression	H.265 / H.265+	H.265 / H.265+
IR	Low-light, IR up to 50ft	Low-light, IR up to 50ft
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB
Features	DWDR	DWDR
Audio	Built-in Mic, Audio In/Out	Built-in Mic, Audio In/Out
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof
Scenarios	Outdoor / Indoor	Outdoor / Indoor
Power	DC12V, PoE	DC12V, PoE





















Compatible Accessories	Compatible with CMIP7562NF-SE and CMIP75122NF-SE		
	 LTB756 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB759 Ceiling Mount 22" (56cm)
	 LTB755 Inclined Ceiling/Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

Covert IP Camera












































SKU	CMIP182W-28
	
Featuring	 
Resolution	2MP, 1920 x 1080 @ 30fps
Fixed Lens	2.8mm Pinhole Camera
Compression	H.265 / H.265+
Features	True WDR 120dB
Audio	Audio Input: 1 Input (Line in)
Power	DC12V



Thermal IP Camera
Surveillance and Heat Signature Detection



















License Plate Recognition IP Camera			Multi-lens IP Camera			Palm-size PTZ IP Camera			
SKU	CMIP7923LPR-22	CMIP7923WLPR-32R	SKU	CMIP7553W4-SZ8		SKU	PTZIP204NW-X4IR		
		 Junction Box Included							
Featuring			Featuring			Featuring			
Resolution	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 60fps	Resolution	20MP Multi-Lens (4 x 5MP), 2560 x 1920 @ 25fps		Resolution	4MP, 2560 x 1440 @ 30fps		
Vari-focal Lens	6 - 22mm Auto Focus VF Motorized Lens	8 - 32mm Auto Focus VF Motorized Lens	Vari-focal Lens	2.8 - 8mm Motorized Lens, Auto Focus, 4 Flexible Lens		Image Sensor	1/3" CMOS		
Lux	0.005 Lux @ F1.2, 0 Lux with White Light	0.002 Lux @ F1.2, 0 Lux with IR	Compression	Advanced Compression H.265 / H.265+		Compression	H.265 / H.265+ / H.264 / H.264+		
IR	4 White Lights for Night Vision	Matrix IR up to 328ft	Features	True WDR 120dB, IR up to 98ft (30m), BLC, HLC, 3D DNR, Defog, EIS		Lux	0.005 Lux @ F1.6 Ultra Low Lux		
Features	True WDR 120dB, 3D DNR, BLC, HLC	True WDR 140dB, BLC, HLC	Storage	MicroSD Card Slot up to 128GB, Automatic Network Replenishment		Lens and Zoom	2.8-12mm, 4x Optical Zoom, Auto Focus		
License Plate Recognition	-	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR	Audio	1 Input (Line in), 1 Output (Line out), Mono Sound		IR Technology	IR LEDs up to 66ft, Auto Intensity Adjustment		
Storage	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 256GB	Alarm	2 Inputs, 2 Outputs		Movement Range	Pan 0° to 330°, Tilt 0° to 90°		
Audio	1 Input (Line in / Mic in), 1 Output, Terminal Block	-	Outdoor Rating	IP67		Features	True WDR 120dB, 3D DNR, HLC, BLC, EIS		
Alarm	1 Input, 1 Output, Terminal Block	2 Input, 2 Output	Vandal Proof	IK10		Audio	Audio In/Out		
Rating	IP67, IK10	IP67, IK10	Power	DC 12V / AC 24V, 22W; PoE+ (802.3at), 19W Class4		Storage	MicroSD Card Slot up to 256GB, ANR		
Compatible Accessories	Compatible with CMIP7923LPR-22 and CMIP7923WLPR-32R		Compatible Accessories	 LTB762N Wall Mount	 LTB751-20 Pendant Mount 7.8" (20cm)	 LTB751 Pendant Mount 20" (50cm)	Outdoor Rating	IK10 Vandal Proof, IP66, Lightning / Surge Protection	
	 LTB801 Junction Box for CMIP7923LPR-22	 LTB378 Pole Mount		 LTB379 Corner Mount	 LTB742 Parapet Wall Mount	 LTB397 Corner Mount		 LTB378 Pole Mount	Power
						Dimensions	2.5" (Φ) Outdoor / Indoor		
						Accessories	PoE Injector and Wall Mount (LTB202) Sold Separately		
						Compatible Accessories	 LTB202 Wall Mount	 LTB773 Pendant Mount 7.8" (20cm)	 LTB774 Pendant Mount 7.8" (20cm)

Platinum PTZ IP Camera |




























SKU	PTZIP412X15WIR		PTZIP414NW-X25IR		PTZIP514NW-X25IR		PTZIP772NW-X32IR		PTZIP688X36	
										
Featuring	     		     		    		    		      	
Resolution	2.1MP, 1080P, 1920 x 1080 @ 30fps		4MP, 2560 x 1440 @ 30fps		4MP, 2560 x 1440 @ 30fps		2.1MP, 1080P, 1920 x 1080 @ 60fps		4K/8MP, 4096 x 2160 @ 30fps	
Image Sensor	1/2.8" CMOS		1/2.5" CMOS		1/2.8" CMOS		1/2.8" CMOS		2/3" CMOS	
Lens and Zoom	5 - 75mm, 15x Optical Zoom, Auto Focus		4.8 - 120mm, 25x Optical Zoom, Auto Focus		4.8 - 120mm, 25x Optical Zoom, Auto Focus		4.8 - 153mm, 32x Optical Zoom, Auto Focus		7.5 - 270mm, 36x Optical Zoom, Auto Focus	
Lux	0.005 Lux @ F1.6 Ultra Low Lux		0.005 Lux @ F1.6 Ultra Low Lux		0.005 Lux @ F1.6 Ultra Low Lux		0.005 Lux @ F1.6 Ultra Low Lux		0.005 Lux @ F1.6 Ultra Low Lux	
Compression	H.265 / H.265+ / H.264 / H.264+		H.265 / H.265+ / H.264 / H.264+		H.265 / H.265+ / H.264 / H.264+		H.265 / H.265+ / H.264 / H.264+		H.265 / H.265+ / H.264 / H.264+	
IR Technology	IR LEDs up to 164ft, Auto Intensity Adjustment		IR LEDs up to 164ft, Auto Intensity Adjustment		IR LEDs up to 492ft, Auto Intensity Adjustment		IR LEDs up to 492ft, Auto Intensity Adjustment		-	
Smart Tracking	Yes		No		Yes		Yes		Yes	
Storage	MicroSD Card Slot up to 256GB, Auto Network Replenishment		MicroSD Card Slot up to 256GB, Auto Network Replenishment		MicroSD Card Slot up to 256GB, Auto Network Replenishment		MicroSD Card Slot up to 256GB, Auto Network Replenishment		MicroSD Card Slot up to 256GB, Auto Network Replenishment	
Movement Range	-5° to 90° (Auto-flip)		-5° to 90° (Auto-flip)		-15° to 90° (Auto-flip)		-15° to 90° (Auto-flip)		-20° to 90° (Auto-flip)	
Image Enhancement	True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS		True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS		True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS		True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS		DWDR, 3D DNR, HLC, BLC, Defog	
Audio and Alarm	Audio In/Out, Alarm In/Out		Audio In/Out, Alarm In/Out		Audio In/Out, Alarm In/Out		Audio In/Out, Alarm In/Out		Audio In/Out, Alarm In/Out	
Outdoor Rating	IK10, IP66 Lightning/Surge Protection		IK10, IP66 Lightning/Surge Protection		IP66 Lightning/Surge Protection		IP66 Lightning/Surge Protection		IK10, IP67 Lightning/Surge Protection	
Power	DC 12V, PoE+ (802.3 at, class4), Max 18W		DC 12V, PoE+ (802.3 at, class4), Max 18W		AC 24V, High PoE Max 40W		AC 24V, High PoE Max 40W		AC 24V, High PoE Max 50W	
Dimensions	4" (Φ)		4" (Φ)		5" (Φ)		7" (Φ)		6" (Φ)	
Accessories	Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB762N) Included, High PoE Injector (60W) Sold Separately		Wall Mount Bracket (LTB762N) Included, High PoE Injector (60W) Sold Separately		Wall Mount Bracket (LTB688-B) Included, High PoE Injector (60W) Sold Separately	
Compatible Accessories	 LTB762N Wall Mount for PTZIP51XX/77XX	 LTB412 Wall Mount for PTZIP41XX	 LTB342-JBOX Junction Box for Wall Mount LTB412	 LTB378 Pole Mount	 LTB397 Corner Mount	 LTB751-20 Pendant Mount 7.8" (20cm) for PTZIP51XX/77XX	 LTB751 Pendant Mount 20" (50cm) for PTZIP51XX/77XX	 LTB742 Parapet Wall Mount for PTZIP51XX/77XX	 POE-PTZIP60N High PoE+ (60W)	

Pro-VS
Platinum
Sapphire
Intercom + Access Control
Accessories








Advanced Level Series DVR









































SKU	LTD8304M-ET	LTD8308M-ETC	LTD8316K-ET	LTD8316M-ET
	 	 		 
Featuring	  	  	 	  
Analog Video Input	4CH (TVI / AHD / CVI / 960H), up to 4MP	8CH (TVI / AHD / CVI / 960H), up to 4MP	16CH (TVI / AHD / CVI / 960H) Channel 1-4 up to 4MP	16CH (TVI / AHD / CVI / 960H), up to 4MP
Record Rate	4MP Lite @ 15fps, 1080P @ 15fps	4MP Lite @ 15fps, 1080P @ 15fps	4MP Lite @ 15fps, 1080P @ 15fps	4MP Lite @ 15fps, 1080P @ 15fps
IPC Input	1CH (up to 5CH), up to 6MP Enhanced IP Mode On: 2CH (up to 6CH), up to 4MP, up to 4Mb/s per channel	2CH (up to 10CH), up to 6MP Enhanced IP Mode On: 4CH (up to 12CH), up to 4MP, up to 4Mb/s per channel	2CH (up to 18CH), up to 6MP Enhanced IP Mode On: 8CH (up to 24CH), up to 4MP, up to 4Mb/s per channel	2CH (up to 18CH), up to 6MP Enhanced IP Mode On: 8CH (up to 24CH), up to 4MP, up to 4Mb/s per channel
Total Bandwidth	72Mb/s	96Mb/s	128Mb/s	128Mb/s
Video Output	VGA / HDMI up to 1920 x 1080P, CVBS	VGA / HDMI up to 1920 x 1080P, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080P, CVBS	VGA / HDMI up to 1920 x 1080P, CVBS
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Deep Learning Support	2CH Human / Vehicle Detection	4CH Human / Vehicle Detection	-	4CH Human / Vehicle Detection
Playback Channel	4CH	8CH	16CH	16CH
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	-	-	-
Network	10/100M, 1 RJ45	10/100M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 10TB	1 SATA up to 10TB	2 SATA up to 20TB	2 SATA up to 20TB
PTZ	1 RS485	1 RS485	1 RS485	1 RS485
Support POS#	-	-	-	-
USB	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W) x 9.5"(D) x 1.8"(H)	12.4"(W) x 9.5"(D) x 1.8"(H)	15"(W) x 12.6"(D) x 1.9"(H)	15"(W) x 12.6"(D) x 1.9"(H)

Professional Level Series DVR

SKU	LTD8504K-DT	LTD8504M-ST	LTD8508K-ST	LTD8508M-ST	LTD8516K-ST	LTD8516M-ST
						
Featuring	  	   	  	   	  	   
Analog Video Input	4CH (HD-TVI / AHD / CVI / 960H)	4CH (HD-TVI / AHD / CVI / 960H)	8CH (HD-TVI / AHD / CVI / 960H)	8CH (HD-TVI / AHD / CVI / 960H)	16CH (HD-TVI / AHD / CVI / 960H)	16CH (HD-TVI / AHD / CVI / 960H)
Analog Input	5MP @ 12fps / 2MP @ 30fps	1st CH up to 8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps
IPC Input	2CH (up to 6CH), up to 8MP Enhanced IP Mode On: 4CH (up to 8CH), up to 4MP, up to 4Mb/s per channel	2CH (up to 6CH), up to 8MP Enhanced IP Mode On: 4CH (up to 8CH), up to 4MP, up to 4Mb/s per channel	4CH (up to 12CH), up to 8MP Enhanced IP Mode On: 8CH (up to 16CH), up to 4MP, up to 4Mb/s per channel	4CH (up to 12CH), up to 8MP Enhanced IP Mode On: 8CH (up to 16CH), up to 4MP, up to 4Mb/s per channel	8CH (up to 24CH), up to 8MP Enhanced IP Mode On: 16CH (up to 32CH), up to 4MP, up to 4Mb/s per channel	8CH (up to 24CH), up to 8MP Enhanced IP Mode On: 16CH (up to 32CH), up to 4MP, up to 4Mb/s per channel
Total Bandwidth	96Mb/s	96Mb/s	128Mb/s	128Mb/s	128Mb/s	128Mb/s
Video Output	HDMI / VGA up to 1080P, CVBS	HDMI up to 2K (2560 x 1440) / VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080P, CVBS
Decoding Format	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Deep Learning Support	4CH Human / Vehicle Detection	2CH Human / Vehicle Detection	-	4CH Human / Vehicle Detection	-	4CH Human / Vehicle Detection
Playback Channel	4CH	4CH	8CH	8CH	16CH	16CH
Audio In/Out	4CH/1CH, RCA	1CH/1CH, RCA	4CH/1CH, RCA	1CH/1CH, RCA	4CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	4CH/1CH	-	8CH/4CH	-	16CH/4CH	-
Network	10/100/1000Mbps, 1 RJ45	10/100Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45
Storage	1 SATA up to 10TB, NAS, IP SAN	1 SATA up to 10TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN
PTZ	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485
Support POS#	-	-	-	-	2 (TCP)	2 (TCP)
USB	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W) x 9.1"(D) x 1.8"(H)	12.4"(W) x 9.5"(D) x 1.8"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.6"(D) x 1.9"(H)	15"(W) x 12.4"(D) x 1.8"(H)	15"(W) x 12.6"(D) x 1.9"(H)

Enterprise Level Series DVR












SKU	LTD9224T-FA	LTD8424K-EA	LTD8432K-EA	LTD8416K-ST	LTD8424K-ST	LTD8432K-ST
						
Featuring						
Analog Video Input	24CH (HD-TVI)	24CH (HD-TVI / AHD / CVI / 960H)	32CH (HD-TVI / AHD / CVI / 960H)	16CH (HD-TVI / AHD / CVI / 960H)	24CH (HD-TVI / AHD / CVI / 960H)	32CH (HD-TVI / AHD / CVI / 960H)
Analog Input	2MP @ 15fps, 720P @ 30fps	2MP @ 30fps	2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps	8MP @ 8fps / 5MP @ 12fps / 2MP @ 30fps
IPC Input	Up to 16CH 1080P @ 30fps	16CH up to 6MP, adjustable up to 40CH	16CH up to 6MP, adjustable up to 48CH	2CH up to 4K/8MP, adjustable up to 18CH	16CH up to 4K/8MP, adjustable up to 40CH	16CH up to 4K/8MP (3840 x 2160), adjustable up to 48CH
Total Bandwidth	200Mb/s	In: 160Mb/s; Out: 128Mb/s	In: 160Mb/s; Out: 128Mb/s	In: 260Mb/s; Out: 220Mb/s	In: 260Mb/s; Out: 220Mb/s	In: 260Mb/s; Out: 220Mb/s
Decoding Format	H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+	H.265 / H.265+ / H.264 / H.264+
Video Output	HDMI1 / VGA, HDMI2 up to 1080P	HDMI1 / VGA up to 1080P, HDMI2 / VGA2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1080P, HDMI2 / VGA2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080P, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080P, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080P, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)
Playback Channel	24CH	16CH	16CH	16CH	16CH	16CH
Audio In/Out	16CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA
Alarm In/Out	16CH/8CH	16CH/4CH	16CH/4CH	16CH/4CH	16CH/4CH	16CH/4CH
Network	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 2 RJ45
Storage	8 SATA up to 48TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap
eSATA	Support	Support	Support	Support	Support	Support
USB	3 USB 2.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0
PTZ	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard
Support POS#	16 (TCP)	8 (TCP)	8 (TCP)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions	17.5"(W) x 18.5"(D) x 3.5"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)	17.5"(W) x 15.3"(D) x 2.8"(H)

Color247 HD-TVI Camera						Turret Fixed Lens HD-TVI Camera				
SKU	CMHT1722W-28CF CMHT1722W-CF	CMHT1752W-28CF	CMHR6422W-CF	CMHR9222W-CF	CMHR9252W-28CF	CMHT2122-28F CMHT2122B-28F CMHT2122F	CMHT2322-28F	CMHT2722-28	CMHT1722B-28F CMHT1722F	CMHT1722WE-28F
										
				Junction Box Included	Junction Box Included					
Featuring	  	  	  	  	  					 
Resolution	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps
Fixed Lens	2.8mm / 3.6mm	2.8mm	3.6mm	3.6mm	2.8mm	2.8mm / 3.6mm	2.8mm	2.8mm	2.8mm / 3.6mm	2.8mm
Lux	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.01 Lux @ F1.2	0.05 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.005 Lux @ F1.2
IR	Clear White LEDs up to 65ft	Clear White LEDs up to 65ft	Clear White LEDs up to 65ft	Clear White LEDs up to 131ft	Clear White LEDs up to 131ft	Up to 65ft	Matrix IR up to 66ft	Matrix IR up to 131ft	Matrix IR up to 131ft	Matrix IR up to 197ft
WDR	True WDR 130dB	True WDR 130dB	True WDR 130dB	True WDR 130dB	True WDR 130dB	DWDR	-	-	DWDR	True WDR 120dB
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	HD-TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
IP Rating	IP67	IP67	IP67	IP67	IP67	IP66	IP66	IP66	IP66	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V
	Compatible with Designated Items Above									
Compatible Accessories	 LTB345/LTB345B Junction Box (White / Black) for CMHT21XX, CMHR64XX	 LTB232 Junction Box for CMHT2322-28F	 LTB03-W/LTB03-B Junction Box (White / Black) for CMHT27XX, CMHT17XX	 LTB307/LTB307B Junction Box (White / Black) for CMHT27XX, CMHT17XX	 LTB342-110T Wall Mount for CMHT21XX	 LTB301 Wall Mount for CMHT27XX, 17XX	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5" (55cm) for CMHT27XX, 17XX	 LTB378 Pole Mount for CMHT21XX, 27XX and 17XX	 LTB379 Corner Mount for CMHT21XX, 27XX and 17XX

Turret Fixed Lens HD-TVI Camera

SKU	CMHT1352N-28F	CMHT1752N-28F	CMHT1752WE-28F	CMHT1782-28F
				
Featuring			 	 
Resolution	5MP, 2560 x 1944 @ 20fps	5MP, 2560 x 1944 @ 20fps	5MP, 2560 x 1944 @ 20fps	8MP, 3840 x 2160 @ 15fps
Fixed Lens	2.8mm	2.8mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Matrix IR up to 65ft	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 197ft
WDR	DWDR	DWDR	True WDR 130dB	DWDR
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
IP Rating	IP67	IP67	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V
	Compatible with Designated Items Above			
Compatible Accessories	 LTB345 Junction Box (White) for CMHT13XX	 LTB307 Junction Box (White) for CMHT17XX	 LTB03-W Junction Box (White) for CMHT17XX	 LTB342-110T Wall Mount for CMHT13XX
	 LTB301 Wall Mount for CMHT17XX	 LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX	 LTB378 Pole Mount	 LTB379 Corner Mount











Turret Vari-focal Lens HD-TVI Camera

SKU	CMHT1923WE-ZF	CMHT1953-ZF	
			
Featuring	  		
Resolution	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	
Vari-focal Lens	2.7 - 13.5mm Vari-focal Motorized Lens, Auto Focus	2.7 - 13.5mm Vari-focal Motorized Lens	
Lux	0.003 Lux @ F1.2	0.01 Lux @ F1.2	
IR	Matrix IR up to 197ft	Matrix IR up to 131ft	
WDR	True WDR 130dB	DWDR	
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	
IP Rating	IP67	IP67	
Power	DC 12V	DC 12V	
	Compatible with All Items Above		
Compatible Accessories	 LTB307 Junction Box (White)	 LTB301 Wall Mount	
	 LTB342-JBOX Junction Box for Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount















Dome Fixed Lens HD-TVI Camera

SKU	CMHD7422-28	CMHD7422B	CMHD7322WE-28F	CMHD7352N-28F	CMHD7352WE-28F	CMHD7382-28F
						
Featuring			  	 	  	  
Resolution	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	5MP, 2560 x 1944 @ 20fps	8MP, 3840 x 2160 @ 15fps
Fixed Lens	2.8mm	3.6mm	2.8mm	2.8mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Smart IR up to 65ft	Smart IR up to 65ft	Matrix IR up to 98ft	Matrix IR up to 65ft	Matrix IR up to 98ft	Matrix IR up to 98ft
WDR	-	-	True WDR 130dB	DWDR	True WDR 130dB	DWDR
Output	HD-TVI	HD-TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Rating	IP66, IK10	IP66, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Axis	3-Axis	3-Axis	3-Axis	3-Axis	3-Axis	3-Axis
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V









Compatible with All Items Above

















Compatible Accessories										
	LTB347 Junction Box (White)	LTB347B Junction Box (Black)	LTB349 Angled Ceiling Mount (15°)	LTB348 Wall Mount (White)	LTB348B Wall Mount (Black)	LTB342-110 Wall Mount	LTB342-110B Wall Mount with Junction Box	LTB376 Pendant Mount 22" (56cm)	LTB378 Pole Mount	LTB379 Corner Mount

Dome Vari-focal Lens HD-TVI Camera

SKU	CMHD3523DWE-ZF	CMHD3453D-ZFN	
	 Junction Box Included	 Junction Box LTB453 Not Included	
Featuring	   	 	
Resolution	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	
Vari-focal Lens	2.7 - 13.5mm Vari-focal Motorized Lens, Auto Focus	2.7 - 13.5mm Vari-focal Motorized Lens	
Lux	0.003 Lux @ F1.2	0.01 Lux @ F1.2	
IR	Matrix IR up to 197ft	Matrix IR up to 131ft	
WDR	True WDR 130dB	DWDR	
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	
Rating	IK10, IP67	IK10, IP67	
Axis	3 Axis	3 Axis	
Power	DC 12V, AC 24V	DC 12V, AC 24V	
Compatible Accessories	Compatible with Designated Items Above		
	 LTB342-140 Wall Mount for CMHD35XX	 LTB342-JBOX Junction Box for Wall Mount LTB342-140	 LTB340 In-Ceiling Mount for CMHD35XX
	 LTB453 Junction Box for CMHD3453D-ZFN	 LTB378 Pole Mount for CMHD34XX/CMIP35XX	 LTB379 Corner Mount for CMHD34XX/CMIP35XX

Bullet Fixed Lens HD-TVI Camera

SKU	CMHR6222	CMHR6322-28F	CMHR6422WE-28F	CMHR6452N-28F
				
Featuring			 	
Resolution	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps
Vari-focal Lens	3.6mm	2.8mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.05 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	IR up to 65ft	IR up to 66ft	Matrix IR up to 100ft	Matrix IR up to 65ft
WDR	-	-	True WDR 130dB	DWDR
Output	HD-TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
IP Rating	IP66	IP66	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V
Compatible Accessories	 LTB345 Junction Box (White) for CMHR62XX/64XX	 LTB232 Junction Box for CMHR6322-28F	 LTB345 Junction Box (White) for CMHR62XX/64XX	 LTB345 Junction Box (White) for CMHR62XX/64XX

Bullet Fixed Lens HD-TVI					Bullet Vari-focal Lens HD-TVI			
SKU	CMHR9422N-F	CMHR9222WE-28F	CMHR9252N-28FN	CMHR9252WE-28F	CMHR9282-28F	CMHR9623DWE-ZF	CMHR9653D-ZFN	CMHR6123DWA
								
Featuring								
Resolution	2MP, 1920 x 1080 @ 30fps	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	5MP, 2560 x 1944 @ 20fps	8MP, 3840 x 2160 @ 15fps	2MP, 1920 x 1080 @ 30fps	5MP, 2560 x 1944 @ 20fps	2MP, 1920 x 1080 @ 30fps
Lens	3.6mm Fixed Lens	2.8mm Fixed Lens	2.8mm Fixed Lens	2.8mm Fixed Lens	2.8mm Fixed Lens	2.7 - 13.5mm Vari-focal Motorized Lens, Auto Focus	2.7 - 13.5mm Vari-focal Motorized Lens	5 - 50mm Vari-focal Lens, Auto Focus
Lux	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2, Ultra Low Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2
IR	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 197ft	Matrix IR up to 263ft	Matrix IR up to 131ft	Matrix IR up to 360ft
WDR	DWDR	True WDR 130dB	DWDR	True WDR 130dB	DWDR	True WDR 130dB	DWDR	True WDR 120dB
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	HD-TVI, CVBS Output
IP Rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP66
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V, AC 24V	DC 12V, AC 24V	DC 12V, AC 24V
Accessory	Junction Box Included	Junction Box Included	LTB345 Not Included	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box LTB801 Not Included	Junction Box Included



Sapphire

Best Value 4K and
Color247 Surveillance

Illuminate with Sapphire Color²⁴⁷

See Color247 IP and HD-CVI cameras bring night-time and low-detail settings to life with full, radiant color




4K Video NVR

Up to 4K video output, recording resolution and decoding capability



5-in-1 DVR

Supports IP, HD-TVI, AHD, HD-CVI, and Analog Video Formats in a single DVR











NVR

SKU	LTN6104-P4	LTN6208N-P8	LTN6216N-P16	LTN6416	LTN6416-P16 NVR-P16-16P-4VA
					
Featuring					
Video Input	4CH IP @ 80Mbps	8CH IP @ 160Mbps	16CH IP @ 160Mbps	16CH IP @ 200Mbps	16CH IP @ 200Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P
Max. Recording Resolution	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)	Up to 4K, 8MP (3840 x 2160)
Decoding Format	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264
Decoding Capability	1CH 4K @ 30fps or 4CH 1080P @ 30fps	2CH 4K @ 30fps or 8CH 1080P @ 30fps	2CH 4K @ 30fps or 8CH 1080P @ 30fps	2CH 4K @ 30fps or 8CH 1080P @ 30fps	2CH 4K @ 30fps or 8CH 1080P @ 30fps
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	4CH/2CH	4CH/2CH	16CH/4CH	16CH/4CH
Built-in PoE	4CH	8CH	16CH	-	16CH
Network	10/100Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 1 RJ45
Storage	1 SATA up to 6TB	2 SATA up to 20TB	2 SATA up to 20TB	4 SATA up to 24TB	4 SATA up to 24TB
Backup	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	10.2"(W) x 8.9"(D) x 1.9"(H)	14.8"(W) x 12.9"(D) x 2.1"(H)	14.8"(W) x 12.9"(D) x 2.1"(H)	17.3"(W) x 16.2"(D) x 3.0"(H)	17.3"(W) x 16.2"(D) x 3.0"(H)

NVR

SKU	LTN6432M	NVR-P32-16P-4VA	LTN6864-R
			
Featuring			
Video Input	32CH IP @ 256Mbps	32CH IP @ 200Mbps	64CH IP @ 384Mbps
Video Output	HDMI up to 4K, VGA up to 1080P	HDMI up to 4K / VGA up to 1080P	HDMI 1 up to 4K / VGA 1 up to 1080P, HDMI 2 up to 4K/ VGA 2 up to 1080P
Max. Recording Resolution	Up to 16MP	Up to 4K, 8MP (3840 x 2160)	Up to 12MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265 / H.264	H.265 / H.264 / MJPEG
Decoding Capability	2CH 4K @ 30fps or 10CH 1080P @ 30fps	2CH 4K @ 30fps or 8CH 1080P @ 30fps	4CH 4K @ 30fps or 16CH 1080P @ 30fps
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	16CH/6CH	16CH/4CH	16CH/8CH
Built-in PoE	-	16CH	-
Network	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 2 RJ45
Storage	4 SATA up to 40TB	4 SATA up to 24TB	8 SATA up to 64TB, 1 eSATA, RAID 0/1/5/10
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	2 USB 2.0, 2 USB 3.0
Dimensions	17.3"(W) x 16.2"(D) x 3.0"(H)	17.3"(W) x 16.2"(D) x 3.0"(H)	17.5"(W) x 18"(D) x 3.7"(H)

Color247 IP Camera		
SKU	LTDHIP3542NW-28ISMLC	LTDHIP8542W-36MLC
		
Featuring		
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps
Fixed Lens	2.8mm	3.6mm
Lux	0.003 Lux @ F1.0	0.002 Lux @ F1.6
Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Image Sensor	1/2.7" 4MP Progressive Scan CMOS	1/1.8" 4MP Progressive Scan CMOS
Features	SMD, True WDR 120dB, LED up to 98ft	SMD, True WDR 140dB, LED up to 66ft
Audio In/Out	Built-in Mic	1CH/1CH
Alarm In/Out	-	1CH/1CH
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB
Rating	IP67	IP67, IK10
Compatible Accessories		
	PFA130-E Junction Box	PFB204W Wall Mount
Compatible Accessories		
	PFA130-E Junction Box	PFA130-E Junction Box

SMD IP Camera			
SKU	LTDHIP3742W-28ISMD LTDHIP3742W-36ISMD	LTDHIP7742W-28MD LTDHIP7742W-36MD	
			
Featuring			
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 30fps	
Fixed Lens	2.8mm / 3.6mm	2.8mm / 3.6mm	
Lux	0.005 Lux @ F1.6	0.005 Lux @ F1.6	
Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG	
Image Sensor	1/3" 4MP Progressive CMOS	1/3" 4MP Progressive CMOS	
Features	SMD, True WDR 120dB, IR up to 165ft	SMD, True WDR 120dB, IR up to 165ft	
Audio In/Out	Built-in Mic	1CH/1CH	
Alarm In/Out	-	1CH/1CH	
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	
Rating	IP67, IK10	IP67, IK10	
Compatible Accessories			
	PFA130-E Junction Box	PFB204W Wall Mount	PFA136 Junction Box
Compatible Accessories			
	PFA130-E Junction Box	PFB203W Wall Mount	PFB203W Wall Mount

Starlight IP Camera

SKU	LTDHIP3642W-28ISM	LTDHIP3682NW-28ISM	LTDHIP7642NW-28M LTDHIP7642NW-36M	LTDHIP7682NW-28M LTDHIP7682NW-36M	LTDHIP8642W-28M				
									
Featuring									
Resolution	4MP, 2560 x 1440 @ 30fps	8MP, 3840 x 2160 @ 15fps	4MP, 2560 x 1440 @ 30fps	8MP, 3840 x 2160 @ 15fps	4MP, 2560 x 1440 @ 30fps				
Fixed Lens	2.8mm	2.8mm	2.8mm / 3.6mm	2.8mm / 3.6mm	2.8mm				
Lux	0.008 Lux @ F1.6	0.009 Lux @ F2.0	0.008 Lux @ F1.6	0.009 Lux @ F2.0	0.008 Lux @ F1.6				
Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG				
Image Sensor	1/3" 4MP Progressive CMOS	1/2.7" 8MP Progressive CMOS	1/3" 4MP Progressive CMOS	1/2.7" 8MP Progressive CMOS	1/3" 4MP Progressive CMOS				
Features	True WDR 120dB, IR up to 98ft	True WDR 120dB, IR up to 98ft	True WDR 120dB, IR up to 98ft	True WDR 120dB, IR up to 98ft	True WDR 120dB, IR up to 98ft				
Audio In/Out	Built-in Mic	Built-in Mic	-	-	-				
Alarm In/Out	-	-	-	-	-				
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB				
Rating	IP67	IP67	IP67, IK10	IP67, IK10	IP67				
Compatible Accessories	 PFA130-E Junction Box	 PFB203W Wall Mount	 PFA130-E Junction Box	 PFB203W Wall Mount	 PFA136 Junction Box	 PFB203W Wall Mount	 PFA136 Junction Box	 PFB203W Wall Mount	 PFA136 Junction Box








Pro-VS

Platinum

Sapphire

Intercom + Access Control

Accessories

Fixed Lens IP Camera						Dual Lens Camera						
SKU	IP-8EB-F40-PAL		LTDHIP7662W-28M IP-6DM-F28-PAL		IP-8DM-F40-PAL		SKU	LTDHIP39442W-28ISM				
												
Featuring							Featuring					
Resolution	8MP, 3840 x 2160 @ 15fps		6MP, 3072 x 2048 @ 20fps		8MP, 3840 x 2160 @ 15fps		Resolution		2 x 4MP Multi-Lens, 2560 x 1440 @ 30fps			
Fixed Lens	4mm		2.8mm		4mm		Fixed Lens		2.8mm			
Lux	0.07 Lux @ F2.0		0.04 Lux @ F1.6		0.07 Lux @ F2.0		Lux		0.005 Lux @ F1.6			
Compression	H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264		Compression		H.265+ / H.265 / H.264+ / H.264 / MJPEG			
Image Sensor	1/2.5" 8MP Progressive Scan CMOS		1/2.9" 6MP Progressive CMOS		1/2.5" 8MP Progressive Scan CMOS		Image Sensor		Two 1/2.7" 4MP Progressive Scan CMOS			
Features	True WDR 120dB, IR up to 164ft		True WDR 120dB, IR up to 98ft		True WDR 120dB, IR up to 98ft		Features		Face Detection, SMD, True WDR 120dB, 2x 110° Angle of View, IR up to 100ft			
Audio In/Out	Built-in Mic		1CH/1CH		1CH/1CH		Audio In/Out		Built-in Mic			
Alarm In/Out	-		1CH/1CH		1CH/1CH		Alarm In/Out		-			
Storage	MicroSD Card Slot up to 128GB		MicroSD Card Slot up to 128GB		MicroSD Card Slot up to 128GB		Storage		MicroSD Card Slot up to 128GB			
Rating	IP67		IP67, IK10		IP67, IK10		Rating		IP67, IK10			
Compatible Accessories	 PFA130-E Junction Box		 PFB204W Wall Mount		 PFA136 Junction Box		 PFB203W Wall Mount		 PFA136 Junction Box		 PFB203W Wall Mount	
Compatible Accessories	 PFA137 Junction Box		 PFB203W Wall Mount									











Motorized Lens IP Camera


SKU	LTDHIP3663W-ISZ	LTDHIP3683W-ISZ	LTDHIP7663W-SZ	LTDHIP7683W-SZ
	 Junction Box Included	 Junction Box Included	 Junction Box Included	 Junction Box Included
Featuring				
Resolution	6MP, 3072 x 2048 @ 20fps	8MP, 3840 x 2160 @ 15fps	6MP, 3072 x 2048 @ 20fps	8MP, 3840 x 2160 @ 15fps
Vari-focal Lens	2.7 - 13.5mm Vari-focal Motorized Lens	2.7 - 12mm Vari-focal Motorized Lens	2.7 - 13.5mm Vari-focal Motorized Lens	2.7 - 12mm Vari-focal Motorized Lens
Lux	0.03 Lux @ F1.4	0.05 Lux @ F1.4	0.03 Lux @ F1.4	0.05 Lux @ F1.4
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Image Sensor	1/2.9" 6MP Progressive CMOS	1/2.5" 8MP Progressive Scan CMOS	1/2.9" 6MP Progressive CMOS	1/2.5" 8MP Progressive Scan CMOS
Features	True WDR 120dB, IR up to 164ft	True WDR 120dB, IR up to 164ft	True WDR 120dB, IR up to 164ft	True WDR 120dB, IR up to 164ft
Audio In/Out	Built-in Mic	Built-in Mic	1CH/1CH	1CH/1CH
Alarm In/Out	-	-	1CH/1CH	1CH/1CH
Storage	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 128GB
Rating	IP67	IP67	IP67, IK10	IP67, IK10
Compatible Accessories	 PFB203W Wall Mount	 PFB203W Wall Mount	 PFB203W Wall Mount	 PFB203W Wall Mount

DVR

SKU	LTD3104C-PL	PVR-P8-1VC	LTD3216C-PL	LTD5104D-KL	LTD5208D-KL	LTD5216D-KL	LTD3432D-PL
							
Featuring							
Analog Video Input	4CH (HD-TVI / AHD / CVI / 960H)	8CH (HD-TVI / AHD / CVI / 960H)	16CH (HD-TVI / AHD / CVI / 960H)	4CH (HD-TVI / AHD / CVI / 960H)	8CH (HD-TVI / AHD / CVI / 960H)	16CH (HD-TVI / AHD / CVI / 960H)	32CH (HD-TVI / AHD / CVI / 960H)
Record Rate	5MP-N @ 10fps / 4MP-N @ 15fps / 2MP @ 30fps	5MP-N @ 10fps / 4MP-N @ 15fps / 2MP @ 30fps	5MP-N @ 10fps / 4MP-N @ 15fps / 2MP @ 30fps	CVI up to 8MP @ 7fps / 5MP @ 12fps / 2MP @ 30fps	CVI up to 8MP @ 7fps / 5MP @ 12fps / 2MP @ 30fps	CVI up to 8MP @ 7fps / 5MP @ 12fps / 2MP @ 30fps	5MP-N @ 10fps / 4MP-N @ 15fps / 2MP @ 30fps
Incoming Bandwidth	24Mb/s	48Mb/s	96Mb/s	64Mb/s	128Mb/s	128Mb/s	128Mb/s
IPC Input	2CH (up to 6CH), up to 6MP	4CH (up to 12CH), up to 6MP	8CH (up to 24CH), up to 6MP	4CH (up to 8CH), up to 8MP	8CH (up to 16CH), up to 8MP	16CH (up to 32CH), up to 8MP	0CH up to 32CH, up to 8MP @ 128Mbps
Video Output	HDMI / VGA up to 1080P	HDMI / VGA up to 1080P	HDMI / VGA up to 1080P	HDMI up to 4K / VGA up to 1080P	HDMI up to 4K / VGA up to 1080P	HDMI up to 4K / VGA up to 1080P	HDMI1 up to 4K, HDMI2 / VGA up to 1080P
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	AI Coding / H.265+ / H.265 / H.264+ / H.264	AI Coding / H.265+ / H.265 / H.264+ / H.264	AI Coding / H.265+ / H.265 / H.264+ / H.264	AI Coding / H.265+ / H.265 / H.264+ / H.264
SMD Support	-	-	-	4 Analog Channels	8 Analog Channels	16 Analog Channels	16 Analog Channels
Playback Channel	4CH	8CH	16CH	4CH	8CH	16CH	16CH
VCA	2CH	4CH	8CH	1CH	2CH	2CH	16CH
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	4CH/1CH, BNC
Alarm In/Out	-	-	-	-	-	-	16CH/6CH
Network	10/100Mbps, 1 RJ45	10/100Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45
Storage	1 SATA up to 10TB	1 SATA up to 10TB	2 SATA up to 20TB	1 SATA up to 10TB	2 SATA up to 20TB	2 SATA up to 20TB	4 SATA up to 40TB, 1 eSATA
PTZ	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485, 1 RS232
USB	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1USB 3.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 2 USB 3.0
Dimensions	12.8"(W) x 10"(D) x 2.2"(H)	12.8"(W) x 10"(D) x 2.2"(H)	14.8"(W) x 11.3"(D) x 2.1"(H)	12.8"(W) x 10"(D) x 2.2"(H)	14.8"(W) x 11.3"(D) x 2.1"(H)	17.32"(W) x 16.54"(D) x 2.99"(H)	17.32"(W) x 16.54"(D) x 2.99"(H)

Color247 CVI Camera	
SKU	LTDHCT3652W-28ISCF
	
Featuring	  
Resolution	5MP 2880 x 1620 @ 25fps
Fixed Lens	2.8mm
Lux	0.001 Lux @ F1.0
White LED	Up to 130ft
WDR	True WDR 120dB
Audio	Built-in Mic
Output	TVI / AHD / CVI / 960H Switchable
Rating	IP67
Power	DC 12V
Compatible Accessories	 PFA130-E Junction Box
	 PFB204W Wall Mount

Fixed Lens Camera			
SKU	HC-2DM-F28-SAL	LTDHCR6122-28PIR	LTDHCR6142-28PIR
			
Featuring			
Resolution	2MP 1920 x 1080 @ 30fps	2MP 1920 x 1080 @ 30fps	4MP 2688 x 1520 @ 30fps
Fixed Lens	2.8mm	2.8mm	2.8mm
Lux	0.02 Lux @ F2.0	0.02 Lux @ F2.0	0.03 Lux @ F2.0
IR	Up to 98ft	PIR up to 33ft, 110 degrees, Red LED Alarm	PIR up to 33ft, 110 degrees, Red LED Alarm
WDR	DWDR	DWDR	DWDR
Output	TVI / AHD / CVI / 960H Switchable	CVI / 960H Switchable	CVI / 960H Switchable
Rating	IP67, IK10	IP67	IP67
Power	DC 12V	DC 12V	DC 12V
Compatible Accessories	 PFA130-E Junction Box	 PFA134 Junction Box	 PFA134 Junction Box
	 PFB204W Wall Mount		






Vari-Focal Lens Camera	
SKU	LTDHCR9643
	
Resolution	4MP 2560 x 1440 @ 30fps
Vari-focal Lens	2.7 - 13.5mm Vari-focal Motorized Lens
Lux	0.03 Lux @ F1.3
IR	Up to 197ft
WDR	DWDR
Output	CVI / 960H Switchable
IP Rating	IP67
Power	DC 12V
Compatible Accessories	 PFA130-E Junction Box











Intercom and Access Control

Scalable Entrance Security Solutions

Access Control - LaView

LV-PYN11-G32	LV-PWFL6	LVA-PUMSD32G-L	LVA-PUMSD64G-L	LVA-PUMSD128G-L
				
<ul style="list-style-type: none"> • 1080P HD Camera with Night Vision • 2.8mm Lens • 9600mAh Battery Recharge via USB • 32GB WD Purple Micro SD Pre-Installed • 2.4GHz Wi-Fi Network 	<ul style="list-style-type: none"> • Motion Detection • Microphone and Speaker • Two-Way Audio • Cloud Storage Available • Magnetic Easy Mounting 	<ul style="list-style-type: none"> • 120° Wide View • 1080P HD Camera with 2 LED and IR • 2.8mm Lens • 2600 Lumen • AC 100-240V 	<ul style="list-style-type: none"> • 2.4GHz Wi-Fi Network • Motion Detection • Microphone and Speaker • Two-Way Audio • Cloud Storage Available 	<ul style="list-style-type: none"> • Ultra-Endurance for Continuous Recording • Storage: 32GB / 64GB / 128GB • Operating Temperature -13°F to 185°F

Access Control - Hugolog

HU01-BLK	HU01-SNL	HU02-BLK	HU02-SNL / EL02	
				
<ul style="list-style-type: none"> • Electronic Deadbolt • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof 	<ul style="list-style-type: none"> • PIN entry with Physical Key Backup • 4 AA Batteries • Available in Satin Nickel or Black 	<ul style="list-style-type: none"> • Electronic Deadbolt • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof 	<ul style="list-style-type: none"> • PIN entry with Physical Key Backup • 4 AA Batteries • Available in Satin Nickel or Black 	
HU03-ORB	HU03-SNL	HU04-ORB	HU04-SNL	HU-BLG
				
<ul style="list-style-type: none"> • Smart Lock with Touchscreen • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof 	<ul style="list-style-type: none"> • Remote Wireless Control Available with Free Mobile App and Bluetooth Hub • Available in Satin Nickel or Rubbed Bronze 	<ul style="list-style-type: none"> • Smart Lock with Touchscreen • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof 	<ul style="list-style-type: none"> • Remote Wireless Control Available with Free Mobile App and Bluetooth Hub • Available in Satin Nickel or Rubbed Bronze 	<ul style="list-style-type: none"> • Smart Lock Bluetooth Gateway • Works with HU03 and HU04 Smart Lock • Wireless Connection to Smart Lock & Wi-Fi • Remote Control Smart Lock over Internet

Pro-VS





Platinum

Sapphire



Intercom + Access Control

Accessories

IP Intercom Outdoor Station





LTH-302M-WIFI	LTH-302M-PS	LTK3410MF	LTK-AQE30E
			
2nd Gen Door Station with True WDR 2MP IPC <ul style="list-style-type: none"> • Compact 4.7" x 2.2" x 0.8" Design • Mifare Reader and Programmable Calling Button • Single Office Application, Call APP Directly • PoE or TCP / IP with DC12V, IP65 Outdoor 	Protective Shield <ul style="list-style-type: none"> • Clear Polycarbonate • 5.90" x 3.13" x 1.91" 	4" Touchscreen Door Station <ul style="list-style-type: none"> • Facial, Card and / or PIN Code Entry Supported • For Single Office Application: 1 Click Call APP with or without Indoor Station • For Multi-Tenant Application: Supports up to 500 Apartment Units • Add Indoor Station for Individual APP Access • TCP / IP, DC 12V, IP65 Outdoor • Compact 6.79" x 3.27" x 0.89" • Add LTK-AQE30E for PoE 	PoE Extractor / Splitter <ul style="list-style-type: none"> • Allows Powering of Non-PoE Devices from a PoE Source • 12VDC Output Power Derived from PoE Source • Selectable for 13W or 25W Output • MagnaCare® Lifetime Replacement, No Fault Warranty • UL 294B Listed • UL / CUL 60950-1 • 30W IEEE 802.3at • CSA C22.2 No.205-M1983, Signal Equipment • RoHS Compliant







IP Intercom Indoor Station

LTH-D301GY-WIFI	LTH-D301-DESK
	
IP Video Indoor Station <ul style="list-style-type: none"> • Configure with 7" Touch Screen • Manage from NVMS V3 PC • Allows APP Access for Door Stations • PoE, DC12V, Wi-Fi • Up to 6 per Office / Apartment Unit 	Desk Stand <ul style="list-style-type: none"> • For LTH-D301GY-WIFI and LTH-D301GY-WIFI-2

Management Software Options

NVMS V3 PC Software + LTS Connect APP	X-VMS VMS Windows Software + X-VMS APP	LTK-E100ME
		
Manage Surveillance, Access Control and Intercom <ul style="list-style-type: none"> • Only 1 PC for Access Control Purposes • LTS Connect APP Supports Single Door Controllers and Intercom • LTS Connect APP can Answer and Unlock Doors • Supports up to 1024 Video and 50 Door Channels • Time Attendance, E-Map 	VMS for LTS Surveillance, Access Control and Intercom <ul style="list-style-type: none"> • Supports Multiple Users from Different Computers and Smartphones • Controls Multi-Door+Single Door Controllers and Intercom • Project-based Pricing • Web for Config, Software for Operation 	LTS Mifare USB Issuer <ul style="list-style-type: none"> • Works with PC Softwares • Supports both NVMS and X-VMS • Easy Enrolling Cards at Client PC, UL Listed

Multi-Door Controller		Wireless Unlock for Any Electrified Openings					
LTK2802		LTK2804		LTK-RT-1		LTK-RT-3	
	<p>LTS 2 Door Controller</p> <ul style="list-style-type: none"> Secure Metal Closure with Lock Supports 4 Wiegand 26 / 34 bit Readers Up to 10,000 Cards and 50,000 Events Build-in 12VDC 8.5A Power Supply 		<p>LTS 4 Door Controller</p> <ul style="list-style-type: none"> Secure Metal Closure with Lock Supports 4 Wiegand 26 / 34 bit Readers Up to 10,000 Cards and 50,000 Events Build-in 12VDC 8.5A Power Supply 		<p>Alarm Controls 1 Door Receiver-Transmitter Kit</p> <ul style="list-style-type: none"> Additional LTK-RT-1T and LTK-RT-1TW 1 Receiver with 2 Transmitter Kits Momentary or Alternative Mode Adjustable 		<p>Alarm Controls 3 Door Receiver-Transmitter Kit</p> <ul style="list-style-type: none"> Additional LTK-RT-1TW 3 Receivers with 1 Transmitter Kit Momentary or Alternative Mode Adjustable







Card Readers for LTS Controllers											
LTK1802M		LTK1802MK		LTK1107M		LTK1107MK		LTK1108M		LTK1108MK	
	<p>LTS Slim Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof 		<p>LTS Slim Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof K Model Comes with Keypad 		<p>LTS Slim Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof 		<p>LTS Slim Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof Keypad Included 		<p>LTS Single Gang Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof 		<p>LTS Single Gang Reader</p> <ul style="list-style-type: none"> Wiegand 26 / 34 Selectable Mifare Classic IP 65 Weather-proof Keypad Included

Mifare Credentials			Cable for Access Control and Intercom								
LTKC1356M		LTKF1356M		LTKF1356M-T		LTAC1802G-CMR		LTAC1806G-CMR		LTAC1822Y-CMR	
											
LTS Mifare Card		LTS Mifare Keyfob		LTS Mifare Thick Keyfob		LTS 18/2 Multi-Purpose Cable		LTS 18/6 Reader Cable 500ft		LTS All-in-One Banana Peel Cable 500ft	
<ul style="list-style-type: none"> 13.56 Mifare Classic 8- and 10-Digit # Printed 		<ul style="list-style-type: none"> 13.56 Mifare Classic 8- and 10-Digit # Printed 		<ul style="list-style-type: none"> 13.56 Mifare Classic 8- and 10-Digit # Printed 		<ul style="list-style-type: none"> 18AWG, 2 Wires, 1000ft For Access Control or Intercom 		<ul style="list-style-type: none"> 18AWG, 6 Wire, 500ft Shielded, Stranded 		<ul style="list-style-type: none"> 18/4 for Maglock or Strike Power Circuit 22/2 and 22/4 for Exit Devices or Sensors 	





Alarm Controls and Securitron Maglocks and Accessories

LTK-600S	LTK-1200S	LTK-600WP	LTK-1200WP	LTK-600D	LTK-1200D	LTK-AM3370	LTK-AM6370
							
<ul style="list-style-type: none"> • Alarm Controls Maglock • 600lb / 1200lb Holding Force, UL294 and UL10C • Add AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> • Alarm Controls Waterproof Maglock • 600lb / 1200lb, Swinging or Sliding Gate • Add AM3370 / 6370 as Gate Bracket 		<ul style="list-style-type: none"> • Alarm Controls Double Door Maglock • 600lb / 1200lb Holding Force, UL294 and UL10C • Add AM3375 / 6375 or 2x AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> • Alarm Controls LZ Bracket • For Mounting Maglocks onto Inward Swinging Doors • AM3370 for 600 Series and AM6370 for 1200 Series 	

Add Two Means of Egress to Your Maglock Installation













LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-NTS-1	LTK-TS-14	LTK-TS-60	LTK-SREX-100	LTK-XMS	LTK-REB-1	LTKREX-W	LTKREX-B			
													
<ul style="list-style-type: none"> • Alarm Controls Green Push Button • 2" SQ Illuminated "Push to Exit," UL294 Listed • TS-2 is SPDT; TS-2-2 is DPDT; TS-2T is SPDT with 2-45s Timer 		<ul style="list-style-type: none"> • Alarm Controls No Touch Sensor with 1-35s Timer • Single Gang Stainless Steel Wall Plate, SPDT 		<ul style="list-style-type: none"> • Alarm Controls Pushbutton with 2-60s Pneumatic Timer, UL294 Listed • 1.5" Large Green / 2.5" Extra Large Red Mushroom Button "Push To Exit", SPDT 		<ul style="list-style-type: none"> • Alarm Controls Focused RTE Motion Sensor • DPDT, UL294 Listed, 3-Year Warranty 		<ul style="list-style-type: none"> • Securitron Adjustable Pattern RTE Motion Sensor • NC only, UL294 Listed, Lifetime Warranty 		<ul style="list-style-type: none"> • Alarm Controls Pushbar & Door Loop, DPDT • 34.5" Request to Exit Pushbar, 18" Door Loop Included 		<ul style="list-style-type: none"> • LTS Motion RTE Motion Sensor • NC Only, DC12V, White -W and Black -B 	

Get a Certified Power Supply that Can Integrate with Fire Alarm

LTK-AQD4-4C1R1	LTK-AQD6-8C8R2	LTK-AQL6-B100R8E1	LTK-AQS1216-16F16R2
			
12 or 24VDC 4A with 4 PTC Output	12 or 24VDC 6A with 8 PTC Output	12 and 24VDC 6A with 8 Fuse Output	12VDC 16A with 16 Fuse Output
<ul style="list-style-type: none"> • Securitron AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty • Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered 		<ul style="list-style-type: none"> • UL294, UL603, ULC-S318, ULC-S533 Listed; RoHS Compliant and REACH Compliant 	

***All ASSA ABLOY ESH Products, including HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.**

Select Electrical Strikes According to Existing Door Hardware

Electrical Strike for Cylindrical Latch				HES Strike Metal Template Kit	
LTK-5000C	LTK-8000C	LTK-AES-300-12	LTK-AES-300-24	LTK-HESCUT-MTK	
					
<ul style="list-style-type: none"> • HES 5000 Strike with 501 and 501A Faceplates • ANSI Metal Jambos or Aluminum Frames • Dual Voltage 12V / 24V DC/AC, UL1034, UL294 Listed 	<ul style="list-style-type: none"> • HES 8000 Strike with 801 and 801A Faceplates • Easy Installation with No Cutting on ANSI Frames • Dual Voltage 12V / 24V DC/AC, UL1034, UL294 Listed 	<ul style="list-style-type: none"> • AES-300 Strike with All Faceplates Included • Ultra Compact for Minimum Cutting on Wood Frames • 300-12 12VDC/AC; 300-24 24VDC/AC, UL1034 Listed 	<p>Free with Purchase of Any 2 HES Strikes (Excluding 9000 Series)*</p>		
For Mortise Latch:	Most Versatile:	Mounting Tabs for Storefront	Change Deadbolt to Mortise Latch on Storefront		
LTK-1500C	LTK-1600CS	LTK-152	LTK-4900-25-628	LTK-4900-26-628	
					
<ul style="list-style-type: none"> • HES 1500 Strike with 1J, 1K, 1KD and 1KM Faceplates • Stainless Steel Construction with 10-Year No-Fault Warranty • Dual Voltage 12V / 24V DC/AC, UL294, UL10C 3 Hours 	<ul style="list-style-type: none"> • HES 1600 Strike with Multiple Faceplates and Deadbolt Brackets • Accommodates Locks Designed for 4-7/8" Strike Plate • UL294, UL10C 3 Hours 	<ul style="list-style-type: none"> • HES 152: Universal Mounting Tabs • Mount Inside Hollow Metal and Aluminum Jambos • Compatible with 5000, 8000, 7400, 1500, 1600 and More 	<ul style="list-style-type: none"> • Adams Rite Mortise Latch, Clear Anodized Finish • Drop-in Replacement for Many Deadbolt and Hook Bolt Locks • 31" / 32" Backset, -25 LH or RHR, -26 RH or LHR 		
For RIM Exit Devices (Push Bar):				Rim Exit Device (Push Bar)	
LTK-9400	LTK-9600	LTK-9500	LTK-EX89R-628		
					
<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • Adams Rite Rim Exit Device • 30"-36" Clear Anodize • 3/4" Pullman Latch • UL305, ANSI / BHMA A156.3-2014 Grade 1 		
<ul style="list-style-type: none"> • For 1/2" Pullman Latch • UL294 Listed 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294 Listed 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294, UL10C 3 Hours Fire Rated 			

*All ASSA ABLOY ESH Products, including HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.

Pro-VS

Platinum

Sapphire

Intercom + Access Control






Accessories









Accessories

airMAX® WIRELESS

NanoBeam / LiteBeam / PowerBeam











UBNT-NBE-M5-16	UBNT-NBE-5AC-GEN2	UBNT-LBE-5AC-GEN2	UBNT-LAP-120-US	UBNT-PBE-5AC-GEN2
				
5 GHz NanoBeam M5 <ul style="list-style-type: none"> • 16dBi, 150+ Mbps, 10+km • (1) 10/100 Ethernet Port • 35° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoBeam AC , Gen2 <ul style="list-style-type: none"> • 19dBi, 450+ Mbps 15+ km • (2) 10/100/1000 Ethernet Ports • Wi-Fi for Management • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz LiteBeam AC, Gen2 <ul style="list-style-type: none"> • 23dBi, 450+ Mbps, 10+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.3A Gigabit PoE Adapter Included 	5GHz LiteBeam AC AP, 120° <ul style="list-style-type: none"> • 16dBi, 450+ Mbps, 10+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz PowerBeam AC, Gen2 <ul style="list-style-type: none"> • 25dBi; 450+ Mbps 25+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included

NanoStation

UBNT-LOCOM2-US	UBNT-LOCOM5-US	UBNT-NSM2	UBNT-NSM5	UBNT-NS-5AC-US	UBNT-NS-WM
					
2.4 GHz NanoStation LocoM2 <ul style="list-style-type: none"> • 8.5dBi, 150+ Mbps, 5+ km • (1) 10/100 Ethernet Port • 60° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation LocoM5 <ul style="list-style-type: none"> • 13dBi, 150+ Mbps, 10+ km • (1) 10/100 Ethernet Port • 45° Beamwidth • 24V, 0.2A PoE Adapter Included 	2.4 GHz NanoStation M2 <ul style="list-style-type: none"> • 11dBi, 150+ Mbps, 13+ km • (2) 10/100 Ethernet Ports • 55° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation M5 <ul style="list-style-type: none"> • 14.6-16.1dBi, 150+ Mbps, 15+ km • (2) 10/100 Ethernet Ports • 43° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation AC <ul style="list-style-type: none"> • 16dBi, 450+ Mbps, 15+ km • (2) 10/100/1000 Mbps Ethernet Ports • 45° Beamwidth • 24V, 0.5A Gigabit PoE Supply Included • Wall Mount Kit (Optional) UBNTNS-WM 	Wall Mount Kit Used for NanoStation

Rocket & Antenna

Accessories

UBNT-ROCKET-M5	UBNT-R5AC-LITE	UBNT-AMO-5G10	UBNT-AMO-5G13	UBNT-UB-AM	UBNT-POE-24-12W-G UBNT-POE-24-24W-G	UBNT-N-SW	UBNT-ETH-SP-G2	UBNT-ACB-ISP	UBNT-ACB-AC
									
5 GHz Rocket M5 BaseStation <ul style="list-style-type: none"> • 150+ Mbps • (1) 10/100 Mbps Ethernet Port • 24V, 1A PoE Adapter Included 	5 GHz Rocket AC BaseStation <ul style="list-style-type: none"> • 500+ Mbps • (1) 10/100/1000 Mbps • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz airMAX Omni Antenna <ul style="list-style-type: none"> • 10dBi • 360° Coverage, 2x2 MIMO Performance 	5 GHz airMAX Omni Antenna <ul style="list-style-type: none"> • 13dBi • 360° Coverage, 2x2 MIMO Performance 	Universal Antenna Mount	PoE Injector <ul style="list-style-type: none"> • Gigabit LAN Port • 0.5A / 1.0A @ 24VDC • 12W / 24W • Support 24V Passive PoE 	NanoSwitch <ul style="list-style-type: none"> • Outdoor 4-port Gigabit switch with PoE Passthrough 	Ethernet Surge Protector, Gen 2	airCube ISP Home WIFI AP <ul style="list-style-type: none"> • (4) 10/100 Fast Ethernet Ports • 24V PoE Passthrough for airMAX CPE • 300 Mbps @ 2.4 GHz • Powered by 24V Passive PoE or 2A Micro USB Adapter • Power Adapter Not Included 	airCube AC Home WIFI AP <ul style="list-style-type: none"> • (4) Gigabit Ethernet Ports • 24V PoE Passthrough for airMAX CPE • 300 Mbps @ 2.4 GHz • 867Mbps @ 5 GHz • Powered by power adapter or PoE • 24V In on LAN Port 1 • 24V, 1A PoE Adapter Included

Pro-VS

Platinum

Sapphire












Intercom + Access Control

Accessories









UniFi® ROUTING SWITCHING WIRELESS

UBNT-UAP-AC-LITE-US	UBNT-UAP-AC-LR-US	UBNT-UAP-AC-PRO-US	UBNT-UAP-AC-HD-US	UBNT-UAP-AC-SHD-US	UBNT-UAP-AC-M-US
					
UniFi AP, AC LITE <ul style="list-style-type: none"> • Ø160 x 31.45 mm • (1) 10/100/1000 Ethernet Port • 300Mbps @ 2.4GHz • 867Mbps @ 5GHz • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 400ft, Indoor • 250+ Users 	UniFi AP, AC Long Range <ul style="list-style-type: none"> • Ø175.7 x 43.2 mm • (1) 10/100/1000 Ethernet Port • 450Mbps @ 2.4GHz • 867Mbps @ 5GHz • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 600ft, Indoor • 250+ Users 	UniFi AP, AC PRO <ul style="list-style-type: none"> • Ø196.7 x 35 mm • (2) 10/100/1000 Ethernet Ports • 450Mbps @ 2.4GHz • 1300Mbps @ 5GHz • 802.3af PoE / 802.3at PoE+ • UniFi Switch (PoE) • Up to 400ft, Indoor / Outdoor • 250+ Users 	UniFi AP, AC HD <ul style="list-style-type: none"> • Ø220 x 48.1 mm • (2) 10/100/1000 Ethernet Ports • 800Mbps @ 2.4GHz • 1733Mbps @ 5GHz • 802.3af PoE • Up to 400ft, Indoor / Outdoor • 500+ Users 	UniFi AP, AC SHD <ul style="list-style-type: none"> • Ø220 x 48.1 mm • (2) 10/100/1000 Ethernet Ports • 800Mbps @ 2.4GHz • 1700Mbps @ 5GHz • 802.3at PoE+ • UniFi Switch (PoE) • Up to 600ft Indoor / Outdoor (Covered) • 1000+ Concurrent Clients • PoE Switch Not Included 	UniFi AP, AC MESH <ul style="list-style-type: none"> • 139.7 x 86.7 x 25.75 mm • (1) 10/100/1000 Ethernet Port • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 600ft, Indoor / Outdoor • 250+ Users
UBNT-UMA-D-US	UBNT-UAP-AC-M-PRO-US	UBNT-UAP-AC-IW	UBNT-UC-CK	UBNT-UCK-G2	UBNT-UCK-G2-PLUS
					
Directional Dual-Band Antenna <ul style="list-style-type: none"> • 201.3 x 128.0 x 32.5 mm • (1) 10/100/1000 Ethernet Port • Beamwidth -2.4GHz 90°, 5GHz 45° • Indoor / Outdoor • Optional mesh antenna designed to work with the UniFi® AC Mesh AP 	UniFi AP, AC MESH PRO <ul style="list-style-type: none"> • 343.2 x 181.2 x 60.2 mm • (2) 10/100/1000 Ethernet Ports • 802.3af PoE • Built-in Antenna • 48V, 0.5A PoE Gigabit Adapter (Included) • Up to 600ft, Outdoor • 250+ Users 	UniFi AP, AC In-Wall <ul style="list-style-type: none"> • 139.7 x 86.7 x 25.75 mm • (3) 10/100/1000 Ethernet Ports • (1) Uplink, (2) Switch Ports • 300Mbps @ 2.4GHz • 867Mbps @ 5GHz • 802.3at PoE+ • UniFi PoE Switch (Not Included) Indoor • 250+ Concurrent Clients 	UniFi Cloud Key, Controller Hybrid Cloud <ul style="list-style-type: none"> • 21.7 x 43.4 x 121.9 mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE or Micro-USB 5V, Minimum 1A • 48V 802.3af or Passive PoE • Connect up to 1 USG • Connect up to 1 USW (UniFi Switch) • Connect up to 23 Aps • 1000 Connected Clients 	UniFi Cloud Key Gen2 <ul style="list-style-type: none"> • 27.10 x 46.80 x 119.75 mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE or Micro-USB 5V, Minimum 1A • Connect up to 1 USG • Connect up to 10 USW (UniFi Switch) • 2000 Connected Clients 	UniFi Cloud Key Plus <ul style="list-style-type: none"> • 131.16 x 27.10 x 134.20 mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE; Quick Charge 2.0/3.0 Power Adapter (9VDC, 2A) • Connect up to 1 USG • Connect up to 10 USW (UniFi Switch) • Connect up to 40 Aps • 2000 Connected Clients • 1 TB 2.5" SATA HDD (User Upgradable*)

UniFi® ROUTING SWITCHING

UBNT-USG	UBNT-USG-PRO-4-US	UBNT-US-8	UBNT-US-8-60W	UBNT-US-24	UBNT-US-48
					
Gateway Router <ul style="list-style-type: none"> • (3) Gigabit Ethernet Ports • (1) RJ45 Serial Port • 512 MB DDR2 RAM System Memory • 2GB On-Board Flash Storage • 7W 	Enterprise Gateway Router <ul style="list-style-type: none"> • (2) Gigabit Ethernet Ports • (2) Gigabit RJ45/SFP Combo Ports • (1) RJ45 Serial Port • 2 GB DDR3 RAM System Memory • 4 GB On-Board Flash Storage, 40W 	8 Port Managed Switch <ul style="list-style-type: none"> • (8) Gigabit Ethernet Ports • (1) PoE Passthrough Port • 12W • Power via DC 48V Power Adapter or PoE Input 	8 Port Managed Switch-4PoE <ul style="list-style-type: none"> • (8) Gigabit Ethernet Ports • (4) Auto-sensing 802.3af PoE Ports • 15W Output Per PoE Port 	24 Port Managed Switch <ul style="list-style-type: none"> • (24) Gigabit Ethernet Ports • (2) SFP Ports • (1) Serial Console Port • 25W, Rack-Mountable 	48 Port Managed Switch <ul style="list-style-type: none"> • (48) Gigabit Ethernet Ports • (2) SFP+ Ports • (2) SFP Ports • (1) Serial Console Port • 56W, Rack-Mountable
UBNT-POE-24-12W-G	UBNT-POE-24-24W-G UBNT-POE-48-24W-G	UBNT-US-8-150W-US	UBNT-US-16-150W	UBNT-US-24-250W	
					
PoE Injector <ul style="list-style-type: none"> • Gigabit LAN Port • 0.5A @ 24VDC • 12W • Support 24V Passive PoE 	PoE Injector <ul style="list-style-type: none"> • Gigabit LAN Port • 1.0A @ 24VDC / 0.5A @ 48VDC • 24W • Support 24V / 48V Passive PoE 	8 Port Managed PoE Switch <ul style="list-style-type: none"> • (8) Gigabit PoE Ports • (2) SFP Ports • 150W, Desktop-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	16 Port Managed PoE Switch <ul style="list-style-type: none"> • (16) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 150W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	24 Port Managed PoE Switch <ul style="list-style-type: none"> • (24) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 250W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	


EdgeMAX® ROUTING SWITCHING

UBNT-ER-X-US	UBNT-ER-X-SFP-US	UBNT-ERLITE-3	UBNT-ER-12	UBNT-ES-24-LITE	UBNT-ES-5XP	UBNT-ES-16-150W	UBNT-ES-24-250W
							
EdgeRouter X <ul style="list-style-type: none"> • (5) Gigabit Ethernet Ports • Passive PoE Passthrough Option • 256MB RAM System Memory • 256MB Storage, 5W • Powered via 12VDC, 0.5A Power Adapter or 24V Passive PoE 	EdgeRouter X SFP <ul style="list-style-type: none"> • (5) Gigabit Ethernet Ports • Passive 24V PoE Output, 50W • (1) SFP Port • 256MB RAM System Memory • 256MB Storage, 5W 	EdgeRouter Lite <ul style="list-style-type: none"> • (3) Gigabit Ethernet Ports • (1) RJ45 Serial Port • 512 MB RAM System Memory • 2GB On-Board Flash Storage • 7W 	EdgeRouter 12 <ul style="list-style-type: none"> • (10) Gigabit Ethernet Ports • (2) SFP Ports • (1) RJ45 Serial Port • 1 GB DDR3 RAM System Memory • 4GB On-Board Flash Storage • 20W 	24 Port Managed Switch <ul style="list-style-type: none"> • (24) Gigabit Ethernet Ports • (2) SFP Ports • (1) Serial Console Port • 25W, Rack-Mountable 	5 Port Managed PoE Switch XP <ul style="list-style-type: none"> • (5) Gigabit PoE Ports • (1) 10/100 Ethernet Management Port • 60W • Support 24V Passive PoE 	16 Port Managed PoE Switch <ul style="list-style-type: none"> • (16) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 150W, Rack-Mountable • Supports POE+ IEEE 802.3at/af and 24V Passive PoE 	24 Port Managed PoE Switch <ul style="list-style-type: none"> • (24) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 250W, Rack-Mountable • Supports POE+ IEEE 802.3at/af and 24V Passive PoE









Unmanaged PoE Switches

POE-SW401S	POE-SW801N	POE-SW1602N	POE-SW2402N		
					
<ul style="list-style-type: none"> 4 Port PoE Switch with 1 Port Uplink • 60W, 802.3af/at • 10/100Mbps, up to 820ft • UL Listed • Network Topology Management, Alarm Push, Network Health Monitor 	<ul style="list-style-type: none"> 8 Port PoE Switch with 1 Port Uplink • 110W, 802.3af/at • 10/100Mbps, up to 820ft • UL Listed 	<ul style="list-style-type: none"> 16 Port PoE Switch with 2GB Uplink • 230W, 802.3af/at • 10/100Mbps, up to 820ft • UL Listed 	<ul style="list-style-type: none"> 24 Port PoE Switch with 2GB Uplink and 2 SFP Ports • 370W, 802.3af/at • 10/100Mbps, up to 820ft • UL Listed 		
VSP0E-SW402	VSP0E-SW802	VSP0E-SW1602	VSP0E-SW2402	POE-I100GF	POE-I100GT
					
<ul style="list-style-type: none"> 4 Port PoE Switch with 2 Port Uplink • 65W, 802.3af/at • 100Mbps, up to 820ft • UL Listed • NDAA Compliant 	<ul style="list-style-type: none"> 8 Port PoE Switch with 2 Port Uplink • 120W, 802.3af/at • 100Mbps, up to 820ft • UL Listed • NDAA Compliant 	<ul style="list-style-type: none"> 16 Port PoE Switch with 2 Port Uplink • 250W, 802.3af/at • 100/1000Mbps, up to 820ft • UL Listed • NDAA Compliant 	<ul style="list-style-type: none"> 24 Port PoE Switch with 2 Port Uplink • 370W, 802.3af/at • 100/1000Mbps, up to 820ft • UL Listed • NDAA Compliant 	<ul style="list-style-type: none"> Single Port Gigabit Injector • 15W, 802.3af/at, • 10/100/1000Mbps 	<ul style="list-style-type: none"> Single Port Gigabit Injector • 30W, 802.3af/at, • 10/100/1000Mbps

IDEAL Tools and Connectors

IDEAL-85-372E IDEAL-85-377E	IDEAL-30-495	IDEAL-35-088	IDEAL-45-074	IDEAL-89-1047E	IDEAL-30-793	IDEAL-33-632	IDEAL-45-605
							
*Sold Per Piece MPN #85-372/ MPN #85-377	MPN #30-495	MPN #35-088	MPN #45-074	*Sold per Piece MPN #89-1047	MPN #30-793	MPN #33-632	MPN #45-605
CAT5e / CAT6 Feed-Thru Modular Plugs	FT-45™ FeedThru Modular Plug Crimp Tool Crimps Feed-Thru, Standard and Shielded	Snips with Stripping Notch	Data T®-Cutter	InSITE™ RG-59 BNC Compression Connectors Window ensures proper cable insertion	OmniSeal™ PRO XL Compression Tool	LinearX@3 Compression Tool	PrepPRO® Coax/UTP Cable Stripper

Power Strips and Extension Cords

LTPE1610/LTPE1625 LTPE1650/LTPE16100	LTPE1225-L3 LTPE1250-L3 LTPE12100-L3	LTPE1420-3	LTPS0802 LTPS0806 LTPS0812	LTPS0606-M	LTPS0806-M	LTPS0806-A	LTPS1215-A
							
• 10/25/50/100ft, 16/3C SJTW Extension Cord • Orange Single Outlet, UL listed	• 25/50/100ft, 12/3C SJTW Extension Cord • Yellow 6ft Cord, Triple Outlet Lighted when power is on, UL listed	• 20ft 14/3C Indoor Extension Cord • Orange Cord, Triple Outlet with sliding cover feature, UL listed	• 8 Outlet Power Strips • White, 2 / 6 / 12ft Cord, UL listed	• 6 Outlet Metal Case Outlet Strips • Yellow, 6ft Cord, ETL listed	• 8 Outlet Metal Case Outlet Strips • Yellow, 6ft Cord, UL listed	• 8 Way Aluminum Alloy Case Power Bar • 6ft Cord, ETL listed	• 12 Way Aluminum Alloy Case Power Bar • 15ft Cord, ETL listed

Pro-VS

Platinum

Sapphire






Intercom + Access Control







Accessories










Power Adapters

PS120V0800	PS120V1000	PS120V2000	PS120V3000	TS5-6W	PS240V1000	PS240V3000	DV-AT12015-D01
							
<ul style="list-style-type: none"> • 800mA • DC 12V 	<ul style="list-style-type: none"> • 1000mA • DC 12V 	<ul style="list-style-type: none"> • 2000mA • DC 12V 	<ul style="list-style-type: none"> • 3000mA • DC 12V 	<ul style="list-style-type: none"> • 5000mA • DC 12V 	<ul style="list-style-type: none"> • 1000mA • AC 24V 	<ul style="list-style-type: none"> • 3000mA • AC 24V 	<ul style="list-style-type: none"> • 1500mA (Max) • AC 24V to DC 12V










Power Supplies

PS120V5-D	DV-AT1207M-D09	DV-AT1209A-D9P	DV-AT1212A-D18P	DV-AT1220A-D18P
				
<ul style="list-style-type: none"> • 4 Port; 5 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 7 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 9 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 20 Amp • Protection: PTC • DC 12V

DV-RT1224A-D24	DV-RT1232A-D32	DV-AC2408A-D07	DV-AC2412A-D10	DV-AT1205A-D07	DV-AT1209A-D9
					
<ul style="list-style-type: none"> • 24 Port; 24 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 32 Port; 32 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 8 Amp • Protection: PTC • AC 24V 	<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: PTC • AC 24V 	<ul style="list-style-type: none"> • 4 Port; 5 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 9 Amp • Protection: Fuse • DC 12V

DV-AT1212A-D18	DV-AT1210A-D07	DV-AT1210A-D10	DV-AT1215A-D10	DV-AT1232A-D18	DV-AT1232A-D27
	 	 	 		
<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 10 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 10 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 18 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 32 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 27 Port; 32 Amp • Protection: Fuse • DC 12V

Passive Video Balun Transceivers DVR Lockboxes Warning Signs

LTAB4020T	LTAB4020NT	LTAB4030TP		LTSTICKER	LTSIGNB	LTSIGNA	LTSIGNOD	ACS-801
								
<ul style="list-style-type: none"> • Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720P / 960P / 1080P / 3MP / 5MP 	<ul style="list-style-type: none"> • 8MP/4K Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720P / 960P / 1080P / 3MP / 5MP / 8MP 	<ul style="list-style-type: none"> • 8MP/4K Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720P / 960P / 1080P / 3MP / 5MP / 8MP 	LT-DVRLB18-18-5 LT-DVRLB21-21-8 LT-DVRLB21-24-8 LTBHWB (Wall Mount Bracket)	<ul style="list-style-type: none"> • Warning Sticker Decal • Weather-Resistant 	9" (W) x 11"(H)	11" (W) x 18" (H)	Sign Outdoor 10.5" x 10.5"	<ul style="list-style-type: none"> • Solar Power (No Battery Needed) • Actively Flashing LCD
















Monitor Brackets CCTV Monitors







LTMB1026	LTMB1737	LTMB2655	LTMB3270	M-185JPGM8	M-215JPGM8
					
<ul style="list-style-type: none"> • Monitor Bracket • For 10"-26" Screen Size • Distance To Wall 35-390mm • Max Loading Weight 10kg 	<ul style="list-style-type: none"> • Monitor Bracket • For 17"-37" Screen Size • Distance To Wall 35-380mm • Max Loading Weight 30kg 	<ul style="list-style-type: none"> • Monitor Bracket • For 26"-55" Screen Size • Distance To Wall 7mm • Max Loading Weight 50kg 	<ul style="list-style-type: none"> • Monitor Bracket • For 32"-70" Screen Size • Distance To Wall 70-390mm • Max Loading Weight 75kg 	Monitors come with: Remote, BNC, HDMI and VGA Inputs	









Connectors











LTA1001	LTA1002	LTA1003	LTA1004	LTA1005	LTA1006	LTA1007	LTA1013	LTA1014	LTA1016	KY5E110
										
BNC Twist-On RG59 Male (20Pcs/Pack)	BNC Male to RCA Female (20Pcs/Pack)	BNC Female to RCA Male (20Pcs/Pack)	BNC Male to RCA Male (20Pcs/Pack)	BNC Coupler Female to Female (20Pcs/Pack)	BNC Compression for RG59 (20Pcs/Pack)	BNC Male Crimp-on (20Pcs/Pack)	BNC Male to 2 BNC Female (20Pcs/Pack)	RJ45 8P8C Cat5e Crimp Connector	RJ45 8P8C Cat6 Crimp Connector	Enhanced Cat5e Keystone Jack

Cables (HDMI, DC Power, RJ45 CAT5e Network)

LT-CT601B LT-CT1201W / LT-CT1201B	LTAC3005 / LTAC3110 LTAC3125 / LTAC3150	LTA2003	LTAC3100	LTA2017 LTA2013	LTA2004 LTA2014	LTA2010 LTA2008	
							
<ul style="list-style-type: none"> • Cable Tie (100Pcs/Pack) • 6in White / Black • 12in White / Black 	<ul style="list-style-type: none"> • HDMI with Ethernet • 4.5 / 10 / 25 / 50ft Cable • Hi-Speed 1080P / 3D, 100% Triple Shield 24K • Gold Plated with Nylon Jacket 	<ul style="list-style-type: none"> • Terminal Connector • 9 Terminal, DC & AC • Connector / Splitter 	<ul style="list-style-type: none"> • 100ft HDMI Cable • Hi-Speed 1080P with USB Booster 26AWG 	<ul style="list-style-type: none"> • DC Power Connector • LTA2017-Male • LTA2013-Female (20Pcs/Pack) 	<ul style="list-style-type: none"> • DC Power Adapter Cable • LTA2004-Male • LTA2014-Female (20Pcs/Pack) 	<ul style="list-style-type: none"> • Male / Female Pigtail • LTA2010-Male • LTA2008-Female 	
LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR	LTAC5100B-CMX LTAC6250B-CMX	LTAC6250W-CMP LTAC6250BL-CMP	LTAC2040 LTAC2046	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B	LTAC2030W / LTAC2030B LTAC2032W / LTAC2032B	LTAC2060W / LTAC2060B LTAC2100W / LTAC2100B LTAC2150W / LTAC2150B
							
<ul style="list-style-type: none"> • 1000ft CAT5e 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Pass Fluke Test • CMR Rated • Color: White / Blue / Black 	<ul style="list-style-type: none"> • 1000ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Pass Fluke Test • CMR Rated • Color: White / Blue / Black 	<ul style="list-style-type: none"> • 1000ft CAT5e/CAT6 99.99% OFC • ETL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Pass Fluke Test • Outdoor Rated, UV Resistance • Color: Black 	<ul style="list-style-type: none"> • 1000ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, TIA-568-C.2 • Pass Fluke Test • Plenum Rated, CMP • Color: White / Blue 	<ul style="list-style-type: none"> • 1000ft CCA CAT5e / CAT6 • Commercial Grade Network Cable 	<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500ft / 1000ft RG59 Coaxial 95% Braided + 18/2 • 18AWG CCA Cable 	<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500ft / 1000ft RG59 Coaxial 95% Braided+ 18/2 • Solid 100% 18AWG Oxygen Free Copper 	<ul style="list-style-type: none"> • Pre-made HD Siamese Cable with BNC and Power Connector • 60ft / 100ft / 150ft • Color: White / Black

CAT6 Patch Cable, CAT5e Pre-made Cable			Control Cable		
LTPC6005BL-CMR LTPC6005W-CMR	LTPC6010BL-CMR LTPC6010B-CMR	LTAC2042 LTAC2041	LTAC1802G-CMR	LTAC1806G-CMR	LTAC1822Y-CMR
					
<ul style="list-style-type: none"> • 5ft CAT6 Patch Cable, 50 Micro Gold • Plated 3 Prong Connector, UL Listed • RoHS Compliant • Pass Fluke Test, CMR Rated • Color: Blue / White 	<ul style="list-style-type: none"> • 10ft CAT6 Patch Cable, 50 Micro Gold Plated • 3 Prong Connector, UL Listed, RoHS Compliant • Pass Fluke Test, CMR Rated • Color: Blue / Black 	<ul style="list-style-type: none"> • Pre-made RJ45 CAT5e Cable • LTAC2042-50ft • LTAC2041-100ft 	<ul style="list-style-type: none"> • 18AWG / 2 Conductor Access Control Wire • 1000ft Stranded • 99.99% OFC • Access Control, Intercom, and Alarm • CMR Rated, UL Listed • Color: Gray 	<ul style="list-style-type: none"> • 18AWG / 6 Conductor Control Wire • 500ft Stranded • 99.99% OFC • CMR Rated • Shielded ETL • Color: Gray 	<ul style="list-style-type: none"> • 500ft Stranded Control Cable • 99.99% OFC • 18/4 + 22/2 + 22/4 + 22/6 Combination Cable • Shielded 22/6 • ETL Rated, CMR Rated • Color: Yellow

Cables (DC Power, VGA, Microphone)							
LTA2005	LTA2006	LTA2011	LTA2018	LTAS06	LTA2001	LTA2002	LTAV3010 / LTAV3025 LTAV3050 / LTAV3100
							
<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 2 Male 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Male to 2 Female 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 4 Male 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 8 Male 	<ul style="list-style-type: none"> • High Sensitivity Audio Monitor Mic • Bug Range: 30sq meters • Frequency: 100-5500Hz 	<ul style="list-style-type: none"> • 12" Microphone with Power Cable • Microphone with Amplifier 	<ul style="list-style-type: none"> • 45" Microphone with Video & Power • Microphone with Amplifier 	<ul style="list-style-type: none"> • VGA Extension Cable 10ft / 25ft / 50ft / 100ft

Converters, Splitters, Extenders					Tools			Dummy Cameras	
LTAH2100E	LTAH014LN	LTAH018L	LTAH3100E	LTAH1070E	LTAH5300T	LTA-T203MS	LTA-T205CM	LTA-T208CS	LT-DUM-301EB
									
<ul style="list-style-type: none"> • USB RJ45 Extender • UBS2, USB A Female • Plug & Play • Cable Type: CAT5, 5E, 6, UTP Extend Distance to 150ft 	<ul style="list-style-type: none"> • 1 in/4 out HDMI Splitter • Support HDMI 1.3 • Support 1080P • HDCP & 3D Support 	<ul style="list-style-type: none"> • 1 in/8 out HDMI Splitter • 8 Identical HDMI Outputs • Up to 225MHz • Support 3D 	<ul style="list-style-type: none"> • VGA / Audio RJ45 Extender • Video Type: VGA • Support 1920 x 1440 • 1x Stereo Audio (R/L) • Extend Distance to 900ft 	<ul style="list-style-type: none"> • HDMI Extender 1080P • Supports 1080P up to 165ft • DC 5V/1A, Power Adapter included 	<ul style="list-style-type: none"> • HD-TVI Distributor • Input: 1x HD-TVI • Output: 3x HD-TVI 	<ul style="list-style-type: none"> • Wire Stripper • Strip Wire (12-22 gauge) with One Pull of Trigger • Built-in Ruler • Splicer with Auto Adjust 	<ul style="list-style-type: none"> • Professional Crimping Tool • BNC Compression, F-Type, RCA Connectors • For CATV, DSS sec. and Residential Cable Connection 	<ul style="list-style-type: none"> • Multi-Modular Plug Crimp, Strip and Cut Tool • Pro Modular Crimp Tool with Cut and Strip Crimp • Types: 8P8C, 6P6C, 4P4C 	

Western Digital.

WD PURPLE™ PRO HDD

Make Your Smart Video Smarter

Pro Performance for Advanced Analytics

- Engineered with advanced capabilities needed for high end smart video solutions
- AllFrame™ AI technology improves ATA streaming to help reduce frame loss and improve overall video playback
- Up to 64 HD single-stream cameras per drive
- Supports an additional 32 AI streams for AI-enabled NVRs
- Supports Western Digital Device Analytics™ (WDDA)
- Workload rating up to 550TB year to support the heavy video data capture and analysis in advanced AI-enabled recorders, video analytics appliances, deep learning analytics servers and cloud-based storage

Capacity	18TB, 14TB, 12TB, 10TB, 8TB
Interface	SATA 6 Gb/s
Form Factor	3.5 inch
MTBF	Up to 2.5 million hours
Warranty	5 years



WD Purple™



Capacity	8TB, 6TB, 4TB, 3TB, 2TB, 1TB
Interface	SATA 6 Gb/s
Form Factor	3.5 inch
MTBF	Up to 1 million hours
Warranty	3 years

- Engineered for mainstream surveillance security systems
- AllFrame™ 4K technology enables high-quality recording
- Up to 64 single-stream cameras per drive
- Supports Western Digital Device Analytics™ (WDDA)
- Workload rating up to 180TB year, 3x the rating of desktop drive

WD Purple™ SC QD101 Ultra Endurance microSD Card



Capacity	1TB, 512GB, 256GB, 128GB, 64GB, 32GB
Interface	SATA 6.0
Form Factor	microSDHCTM (32GB only) / microSDXTM
Warranty	5 years

- Optimized for video surveillance cameras that operate 24/7
- Designed with ultra endurance for continuous operation
- Weather-resistant, humidity resistant, and withstands temperatures from -25°C to 85°C
- Failover local storage, continuous recording, even in case of a temporary camera disconnection
- Supports card health monitor functionality
- Advanced 96-layer 3D NAND Technology



SkyHawk



SkyHawk AI



Exos

	SMB Surveillance DVR and NVR	AI Surveillance NVR	Centralized/NVR Analytics
Form Factor	3.5-inch	3.5-inch	3.5-inch
Capacity	1TB, 2TB, 3TB, 4TB, 6TB	8TB, 10TB, 12TB, 16TB, 18TB	2TB, 4TB, 6TB, 8TB, 10TB, 12TB, 14TB, 16TB, 18TB
Health Management	2TB and up	Yes	-
NVR-Ready	Yes (RV Sensors)	Yes (RV Sensors)	Yes (RV Sensors)
# of Cameras Supported	64 Cameras	64 Cameras, 32 AI Streams	-
Workload Rating	180TB/year	550TB/year	550TB/year
Data Recovery Services	3 Years	3 Years	-
Warranty	3-Year Warranty	3-Year Warranty	5-year Warranty



Video Solutions for Security Professionals

Arizona

2850 S. 36th Street, Suite A-7
Phoenix, AZ 85034
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI
En LTS Arizona hablamos español

Florida - Miami

8400 NW 25th St., Suite 110
Miami, FL 33122
Tel: 786-693-1813
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español

Maryland

4501 Forbes Blvd., Suite I
Lanham, MD 20706
Tel: 240-493-8988
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI
En LTS Maryland hablamos español

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (CST): MON - FRI
En LTS Dallas hablamos español

California - Los Angeles*

17333 Freedom Way
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-455-2838
Email: Contact.LosAngeles@ltsecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

Georgia

5933 Peachtree Industrial Blvd, Suite B
Norcross, GA 30092
Tel: 678-710-3788
Email: Support.GA@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

New Jersey - Mount Laurel*

109 West Park Dr., Suite B & C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

Texas - Houston*

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

California - San Francisco

38507 Cherry St. Suite G
Newark, CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI

Illinois

1951 Landmeier Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

New York

99 Seaview Blvd., Suite 1B
Port Washington, NY 11050
Tel: 646-558-3888
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
After-hour Pickup Available
En LTS New York hablamos español



Visit LTSecurityinc.com

* Indicates Central Hub Location